

# DMU-25 / DMU-30 / DMU-40 TOUCH II

## MEDIUM SPIN | HARD-MOUNT | WASHER EXTRACTOR



### TOUCH II

User friendly and totally programmable control.  
7" color touch screen.  
Create an infinite number of programs (29 pre-set and time-of-day promotions).  
Import and export programs, statistics, and software updates via USB.  
8 programmable signals for automatic liquid dosing.  
Play videos.  
37 available languages.  
Wet Cleaning ready.



### G FACTOR

Up to **300G** (hard-mount, medium spin washers)



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customization  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø14" (DMU-25/30) - Ø18" (DMU-40)  
Easy opening/closing system for door lock.



### MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models.  
Technical menu: traceability, error diagnosis.



### OTHERS

Grey skinplate outer casing  
3 standard water inlets.  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
ETL, CE, and WRAS certified product.



### OPTIONS

- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Double drain (DMU-40)
- External double drain 3" (recommended for DMU-25/30)
- Normally closed valve
- Water RE-CYCLE system.
- Anchoring base
- Kit with 6 extra dosing signals
- Printer
- DomusConnect communication kit.
- Silicone gasket
- Reversible door opening
- Steam kit to transform an E or HW heated machine into steam version
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

# TECHNICAL DATA

# UNIT.


# DMU - 25

# DMU - 30

# DMU - 40

DRUM							
Load capacity	lbs	25	30	40			
Volume	cu ft	3.5	4.5	6			
Diameter	in	24.4	24.4	27.55			
Depth	in	13	16.92	18.50			
GENERAL DATA							
Wash speed / Spin speed	rpm	53/932	53/929	47/874			
G Force	-	300	300	300			
Maximum force transmitted	kN	2.08 ±5	2.36 ±6	2.77 ±5			
Dynamic force frequency	Hz	12.66	12.66	12.00			
Noise level	dB	< 70	< 70	< 70			
Self-service version	-	Yes	Yes	Yes			
Double drain	-	Opt. (external)	Opt. (external)	Opt.			
Weighing system	-	No	No	No			
SLUICE option	-	No	No	No			
DOOR							
Height door centre / Height door base	in	22/12.2	22.44/12.2	25.78/13.70			
Diameter	in	14.68	14.68	18.11			
POWER							
Motor	Hp	1.48	1.48	2.9			
Heating electric mod.	kW	6	9	12			
Maximum electrical power	kW	6.25	9.5	12.75			
Maximum steam and hot water power	kW	1.1	1.1	2.15			
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
208-240V / 50-60 Hz / 1	FLA (Amp)	32 A	6 A	50 A	6 A	63 A	10 A
208-240V / 50-60 Hz / 3	FLA (Amp)	20 A	-	32 A	-	40 A	-
440V / 50-60 Hz / 3	FLA (Amp)	16 A	-	16 A	-	20 A	-
Steam inlet (Steam mod.)	in	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Maximum steam consumption (Steam. mod.)	lbs/h	15.5	18.8	26.5	26.5	26.5	26.5
Water inlet	inch	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Grid pressure	kg/cm²	2-4	2-4	2-4	2-4	2-4	2-4
Maximum water consumption *	gal/h	16.24	20.81	26.50	26.50	26.50	26.50
Drain	in	3"	3"	3"	3"	3"	3"
Drainage capacity	gal/min	52.8	52.8	52.8	52.8	52.8	52.8
DIMENSIONS / DIMENSIONS WITH PACKAGING							
Width / Width	in	28.3 / 31.5	28.3 / 31.5	31 / 33	31 / 33	31 / 33	31 / 33
Depth / Depth	in	26.4 / 39	32.67 / 39	33 / 39.76	33 / 39.76	33 / 39.76	33 / 39.76
Height / Height	in	45.59 / 53.14	45.59 / 53.14	51.45 / 59	51.45 / 59	51.45 / 59	51.45 / 59
Net weight / Gross weight	lbs	478 / 496	526 / 545	620 / 664	620 / 664	620 / 664	620 / 664
Gross volume (with packaging)	cu ft	37.8	37.8	46	46	46	46

\* Program n° 20, 75 % load.

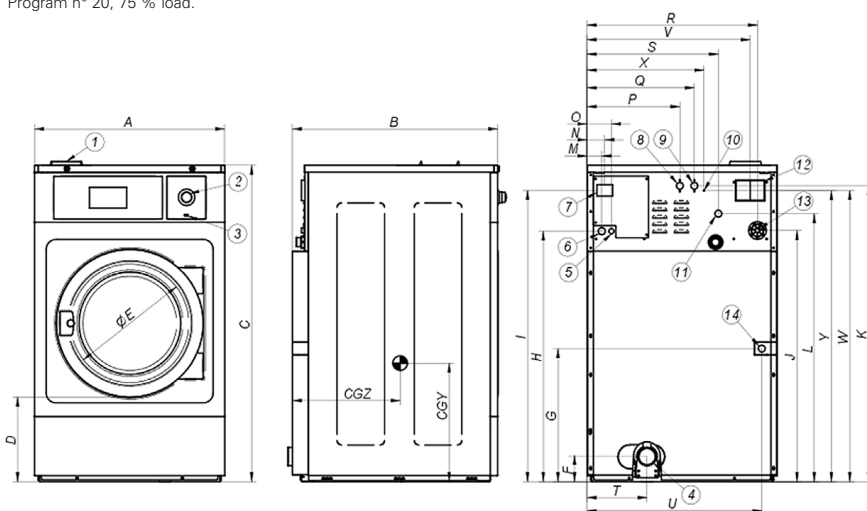

- ① Soap dispenser.
- ② Emergency stop.
- ③ USB port.
- ④ Drain.
- ⑤ Electrical connection to liquid soap pumps.
- ⑥ Electrical connection.
- ⑦ Main switch.
- ⑧ Auxiliary water inlet.
- ⑨ Hot water inlet.
- ⑩ Ground connection.
- ⑪ Cold water inlet.
- ⑫ Water overflow.
- ⑬ Connection for liquid soap.
- ⑭ Steam connection.

DIMENSIONS (in)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DMU-25	28.31	26.93	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-30	28.31	32.68	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-40	31.02	33.07	51.46	13.70	18.11	4.25	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.80	28.50	23.61	47.36	19.09	47.32	18.86	21.50