

DLU-80C / DLU-100C TOUCH II

LOW SPIN | HARD-MOUNT | WASHER EXTRACTOR



TOUCH II

User friendly and totally programmable control.
7" color touch screen.
Create an infinite number of programs (29 pre-set and time-of-day promotions).
Import and export programs, statistics, and software updates via USB.
8 programmable signals for automatic liquid dosing.
Play videos.
37 available languages.
Wet Cleaning ready.



G FACTOR

Up to **200G** (hard-mount, low spin washers)



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customization
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø22"
Easy opening/closing system for door lock.



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models.
Technical menu: traceability, error diagnosis.



OTHERS

Grey skinplate outer casing
3 standard water inlets.
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
ETL, CE, and WRAS certified product.




OPTIONS

- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Double drain
- Normally closed valve
- Water RE-CYCLE system.
- Anchoring base
- Kit with 6 extra dosing signals
- Printer
- DomusConnect communication kit.
- Reversible door opening
- Steam kit to transform an E or HW heated machine into steam version
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage
- SLUICE: model with 8mm drum perforations

LAUNDRY | WASHERS

TECHNICAL DATA	UNIT.	DLU - 80C	DLU - 100C
DRUM			
Load capacity	lbs	80	100
Volume	cu ft	12.36	14.83
Diameter	in	33.85	33.85
Depth	in	23.7	28.5
GENERAL DATA			
Wash speed / Spin speed	rpm	45/644	45/644
G Force	-	200	200
Maximum force transmitted	kN	4.59 ±8	4.59 ±8
Dynamic force frequency	Hz	7.58	7.58
Noise level	dB	< 70	< 70
Self-service version	-	Yes	Yes
Double drain	-	Opt.	Opt.
Weighing system	-	No	No
SLUICE option	-	Yes	Yes
DOOR			
Height door centre / Height door base	in	28.9 / 17.3	28.9 / 17.3
Diameter	in	22	22
POWER			
Motor	Hp	4	6
Heating (electric heating model)	kW	21	21
Maximum power (electric heating model)	kW	22	22
Maximum power (steam and hot water model)	kW	4	6
CONNECTIONS			
		ELECTRIC	STEAM / HOT WATER
208-240V / 50-60 Hz / 1	FLA (Amps)	-	20
208-240V / 50-60 Hz / 3	FLA (Amps)	63	-
440V / 50-60 Hz / 3	FLA (Amps)	40	-
Steam inlet (Steam mod.)	in	3/4"	3/4"
Maximum steam consumption (Steam, mod.)	lbs/h	40	40
Water inlet	in	3/4"	3/4"
Grid pressure	kg/cm2	2-4	2-4
Maximum water consumption *	gal/h	52.72	52.72
Drain	in	3"	3"
Drainage capacity	gal/min	52.8	52.8
DIMENSIONS / DIMENSIONS WITH PACKAGING			
Width / Width	in	38.50 / 42.00	38.50 / 42.00
Depth / Depth	in	42.00 / 50.00	47.24 / 59.00
Height / Height	in	55.55 / 63	55.55 / 63
Net weight / Gross weight	lbs	1043 / 1109	1153 / 1219
Gross volume (with packaging)	cu ft	76.6	90.3

* Program n° 20, 75 % load.

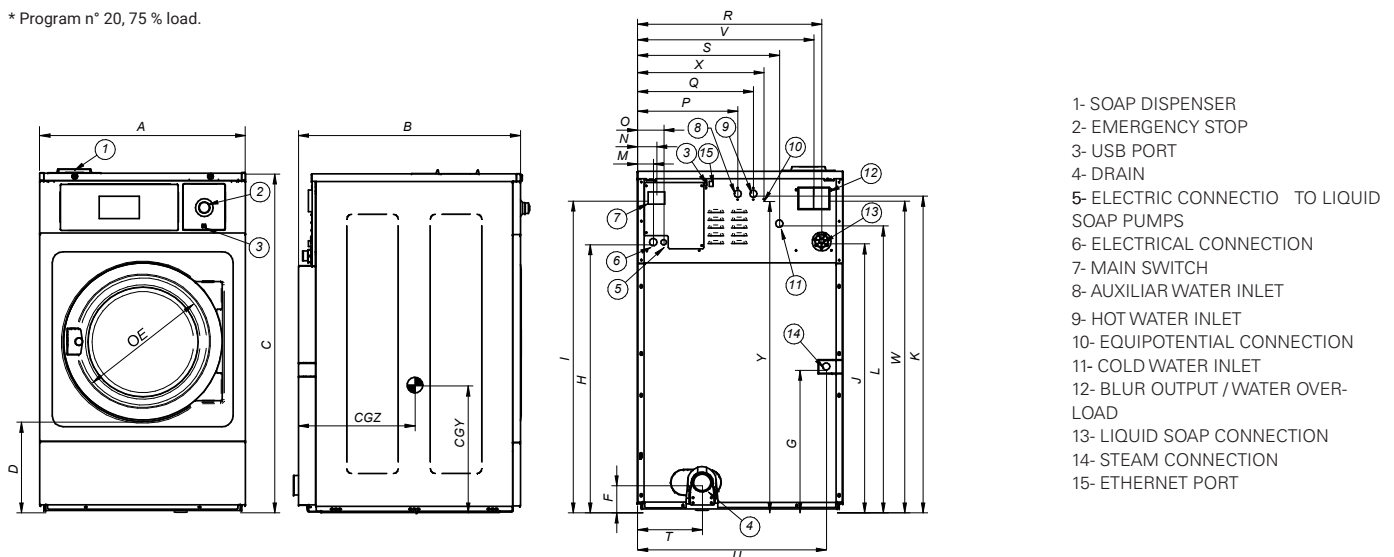

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLU-80C	in	38.5	42	55.6	14.6	22	5.8	24.5	44.8	51.5	44	52	47.7	2.4	2.9	4	21.5	24.6	34.8	28.2	10.3	36.1	33.7	50.4	30	54	25	26.85
DLU-100C	in	38.5	46.7	55.6	14.6	22	5.8	24.5	44.8	51.5	44	52	47.7	2.4	2.9	4	21.5	24.6	34.8	28.2	10.3	36.1	33.7	50.4	30	54	25	30