

# DLU-135 TOUCH II

## LOW SPIN | HARD-MOUNT | WASHER EXTRACTOR



### TOUCH II

User friendly and totally programmable control.  
7" color touch screen.  
Create an infinite number of programs (29 pre-set and time-of-day promotions).  
Import and export programs, statistics, and software updates via USB.  
8 programmable signals for automatic liquid dosing.  
Play videos.  
37 available languages.  
Wet Cleaning ready.



### G FACTOR

Up to **150G** (hard-mount, low spin washers)



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customization  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø 22"  
Easy opening/closing system  
Robust door lock.



### MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models.  
Technical menu: traceability, error diagnosis.



### OTHERS

Grey skinplate outer casing  
3 standard water inlets.  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
ETL, CE, and WRAS certified product.



### OPTIONS

- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Double drain
- Normally closed valve
- Water RE-CYCLE system.
- Anchoring base
- Kit with 6 extra dosing signals
- Printer
- DomusConnect communication kit.
- Reversible door opening
- Steam kit to transform an E or HW heated machine into steam version
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

**DRUM**

Load capacity	lbs	135
Volume	cu ft	21
Diameter	in	41.26
Depth	in	26.92

**GENERAL DATA**

Wash speed / Spin speed	rpm	42.5/505
G Force	-	150
Maximum force transmitted	kN	9.12 ± 15
Dynamic force frequency	Hz	6.93
Noise level	dB	< 70
Self-service version	-	Opt.
Double drain	-	Opt.
Weighing system	-	No
SLUICE option	-	No

**DOOR**

Height door centre / Height door base	in	35.43 / 21.26
Diameter	in	22

**POWER**

Motor	kW	5.5
Heating (electric heating model)	kW	28.8
Maximum power (electric heating model)	kW	31.3
Maximum power (steam and hot water model)	kW	5.5


**CONNECTIONS**

		ELECTRIC	STEAM / HOT WATER
208-240V / 50-60 Hz / 1	FLA (Amp)	-	-
208-240V / 50-60 Hz / 3	FLA (Amp)	100 A	32 A
440V / 50-60 Hz / 3	FLA (Amp)	63 A	20 A
Steam inlet (Steam mod.)	in	3/4"	
Maximum steam consumption (Steam, mod.)	lbs/h	46.3	
Water inlet	inch	3/4"	
Grid pressure	kg/cm <sup>2</sup>	2-4	
Maximum water consumption *	Gal/h	165.87	
Drain	in	3"	
Drainage capacity	gal/min	52.8	

**DIMENSIONS / DIMENSIONS WITH PACKAGING**

Width / Width	in	48.25 / 53.54
Depth / Depth	in	50.35 / 58.16
Height / Height	in	64.56 / 74
Net weight / Gross weight	lbs	2050 / 2314
Gross volume (with packaging)	cu ft	131.72

\* Program n° 20, 75 % load.

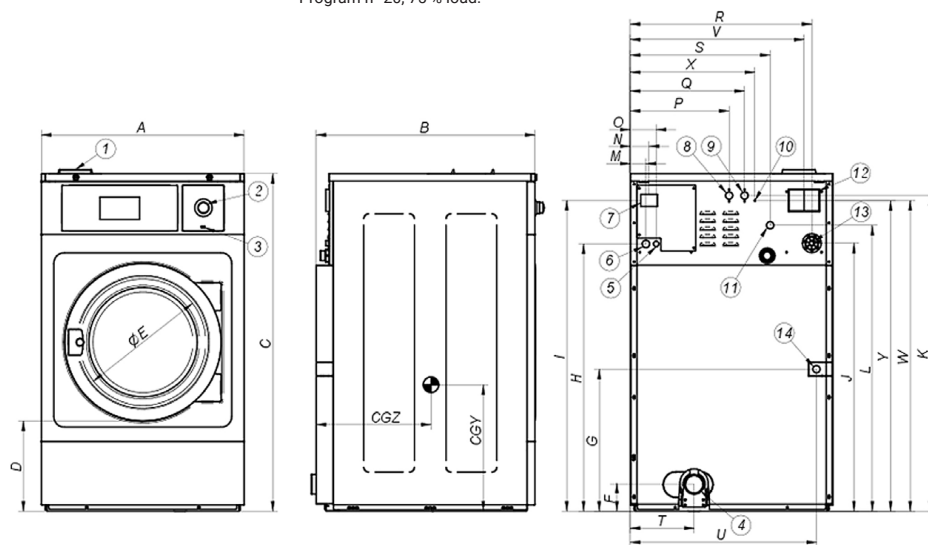

- ① Soap dispenser.
- ② Emergency stop.
- ③ USB port.
- ④ Drain.
- ⑤ Electrical connection to liquid soap pumps.
- ⑥ Electrical connection.
- ⑦ Main switch.
- ⑧ Auxiliary water inlet.
- ⑨ Hot water inlet.
- ⑩ Ground connection.
- ⑪ Cold water inlet.
- ⑫ Water overflow.
- ⑬ Connection for liquid soap.
- ⑭ Steam connection.

DIMENSIONS (in)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGZ	CGZ
DLU-135	48.23	50.35	64.57	21.26	22.05	5.51	38.74	53.86	60.47	51.42	61.06	51.89	2.40	2.91	3.98	25.63	28.78	43.70	34.21	10.63	45.79	42.52	57.87	39.06	62.80	25.35	38.27