

## DHU-60 / DHU-80 TOUCH II

### HIGH SPIN | SOFT-MOUNT | WASHER EXTRACTOR



#### TOUCH II

User friendly and totally programmable control.  
7" color touch screen.  
Create an infinite number of programs (29 pre-set) and time-of-day promotions.  
Import and export programs, statistics, and software updates via USB.  
8 programmable signals for automatic liquid dosing.  
Play videos.  
37 available languages.  
Wet Cleaning ready.



#### G FACTOR

Up to **450G** (soft-mount, high spin washers)



#### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



#### VERSATILITY

Make to order: customization  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



#### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



#### ERGONOMICS

Biggest door diameters: Ø18" (DHU-60) - Ø22" (DHU-80)  
Easy opening/closing system for door lock.



#### MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models.  
Technical menu: traceability, error diagnosis.



#### OTHERS

Grey skinplate outer casing  
3 standard water inlets.  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
ETL, CE, and WRAS certified product.



#### OPTIONS

- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Double drain
- Normally closed valve
- Water RE-CYCLE system.
- Levelling feet
- Auto Weight: automatic weighing sensor system.
- Kit with 6 extra dosing signals
- Printer
- DomusConnect communication kit
- Silicone gasket
- Reversible door opening
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align loading height (door base at 33.5")
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

## TECHNICAL DATA

## UNIT.

## DHU - 60 TOUCH II

## DHU - 80 TOUCH II

## DRUM

Load capacity	lbs	60	80
Volume	cu ft	9	12
Diameter	in	30.3	33.82
Depth	in	20.8	23.7

## GENERAL DATA

Wash speed / Spin speed	rpm	45 / 1024	42.5 / 966
G Force	-	450	450
Maximum force transmitted	kN	4.92 ±1.75	7.36 ±2.45
Dynamic force frequency	Hz	15	14.3
Noise level	dB	< 70	< 70
Self-service version	-	Yes	Yes
Double drain	-	Opt.	Opt.
Weighing system	-	Opt.	Opt.

## DOOR

Height door centre / Height door base	in	34/22	34/22
Diameter	in	18.11	22

## POWER

Motor	Hp	4	5.36
Heating (electric heating model)	kW	18	21
Maximum power (electric heating model)	kW	19.2	22
Maximum power (steam and hot water model)	kW	4	4


## CONNECTIONS

		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
208-240V / 50-60 Hz / 1	FLA (Amps)	-	20	-	-
208-240V / 50-60 Hz / 3	FLA (Amps)	63	20	63	20
440V / 50-60 Hz / 3	FLA (Amps)	32	-	40	16
Steam inlet (Steam mod.)	in	3/4"	3/4"		
Maximum steam consumption (Steam, mod.)	lbs/h	40	40		
Water inlet	in	3/4"	3/4"		
Grid pressure	kg/cm <sup>2</sup>	2-4	2-4		
Maximum water consumption *	gal/h	52.72	52.72		
Drain	in	3"	3"		
Drainage capacity	gal/min	52.8	52.8		

## DIMENSIONS / DIMENSIONS WITH PACKAGING

Width / Width	in	38.50 / 42.00	38.50 / 42.00
Depth / Depth	in	42.00 / 50.00	47.24 / 59.00
Height / Height	in	55.55 / 63	55.55 / 63
Net weight / Gross weight	lbs	1043 / 1109	1153 / 1219
Gross volume (with packaging)	cu ft	76.6	90.3

\* N°20 Program, 75% load

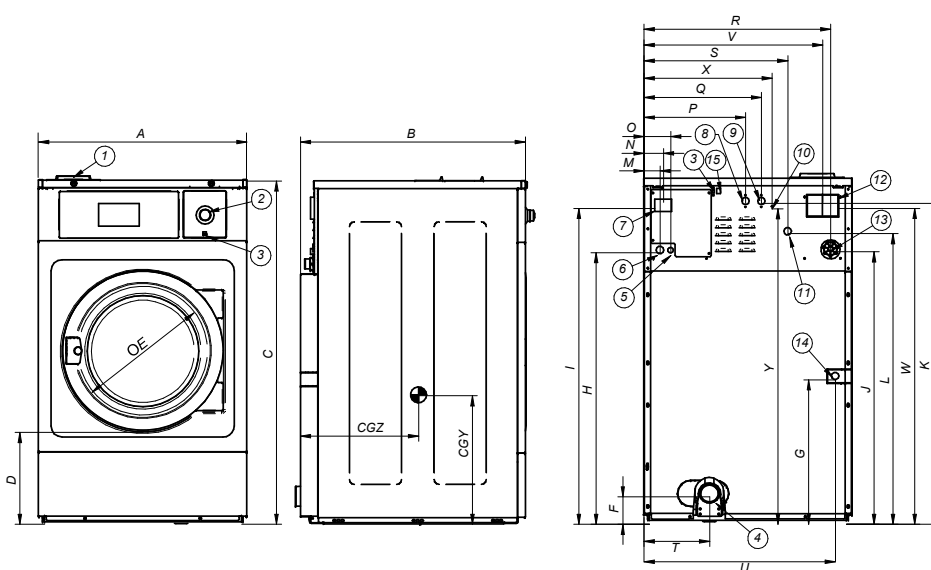

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVER-LOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

DIMENSIONS		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGZ	CGY
DHU-60	in	38.5	42	55.6	14.6	22	5.8	24.5	44.8	51.5	44	52	47.7	2.4	2.9	4	21.5	24.6	34.8	28.2	10.3	36.1	33.7	50.4	30	54	25	26.85
DHU-80	in	38.5	46.7	55.6	14.6	22	5.8	24.5	44.8	51.5	44	52	47.7	2.4	2.9	4	21.5	24.6	34.8	28.2	10.3	36.1	33.7	50.4	30	54	25	30