

UDLM-25/35/50 ESSENTIAL TUMBLE DRYERS



M PROGRAMMER

New M Control Display: Simple, user-friendly and economic. Programmable with external console push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Frequency inverter as standard
Galvanized drum as standard



EFFICIENCY

Radial airflow
Extra Large Steel Lint Filter



VERSATILITY

Make to order - customization
OPL > VENDED - Standard OPL model that can be easily changed to vended laundry.



ERGONOMICS

Accessible lint filter
Large diameter doors
Door opening direction adjustable on site



MAINTENANCE

Hinged Front Panel: easy and ergonomic access
Technical menu: statistics, alarm, auto-test, data recovery for technicians and maintenance with M console



OTHERS

White painted panels
Transmission by direct drive
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: gas
CE and ETL approved




OPTIONS

- M Control programming console
- New M Control with display
- Wooden packing
- Exhaust Ø 8"
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDLM-25 ESSENTIAL		UDLM-35 ESSENTIAL		UDLM-50 ESSENTIAL	
CAPACITY								
Capacity 1/18	lb	26		40		60		
Capacity 1/20	lb	25		35		50		
Hourly Output*	lb/h	63		70		89.5		
Evaporation Capacity*	l/h	14.5		16.3		20.4		
DRUM								
Ø Drum	in	29.50		29.50		33		
Ø Door	in	22.50		22.50		22.50		
Door Center Height	in	38.50		38.50		40.50		
Door Bottom Height	in	27		27		29.25		
Drum Depth	in	18.70		29.30		31.50		
Drum Volume	cu ft	7		12		17		
POWER								
Drum motor power	hp	1/2		1/2		1/2		
Fan motor power	hp	0.33		0.33		0.75		
Electric heating power	kW	Not Available		Not Available		Not Available		
Total electric power (elec.model)	kW	Not Available		Not Available		Not Available		
Gas heating power	btu/h	70,000		70,000		105,000		
Total electric power (gas model)	kW	0.89		0.89		1.3		
Steam heating power	kW	40		40		66		
Total electric Steam heating power	kW	0.89		0.89		1.3		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	
120 V / 60 Hz / 1	FLA	-	20A	-	20A	-	20A	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-	Not Available	-	
Ø Gas inlet	BSP	1/2''		1/2''		1/2''		
Ø Steam inlet	BSP	3/4''		3/4''		1''		
Ø Condensed (Steam	BSP	3/4''		3/4''		1''		
DIMENSIONS / PACKING DIMENSIONS								
Net Width / Gross Width	in	31 / 34		31 / 34		35 / 38		
Net Depth / Gross Depth	in	33 / 37		44 / 48		49 / 53		
Net Height / Gross Height	in	67 / 73		67 / 73		71 / 76		
Height without heating battery	in	-		-		-		
Net weight / Gross weight	lb	379 / 396		412 / 440		462 / 485		
OTHERS								
Max airflow	CFM	500		500		706		
Ø Duct Size	in	8		8		8		
Sound level	dB	64		64		65		

* It may vary depending on the type of heating, filter cleanliness or extraction

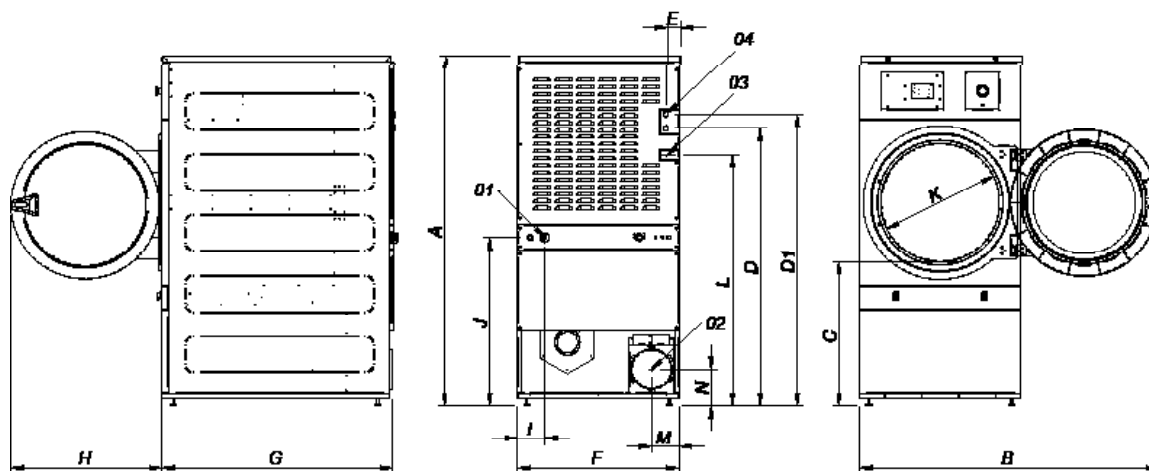

- 01 ELECTRIC CONNECTION
- 02 DUCT SIZE Ø 8"
- 03 GAS CONNECTION 1/2"
- 04 STEAM CONNECTION 3/4"

	A	B	C	D	D1	E	F	G	H	I	J	K	L	M	N
UDLM-25 ESSENTIAL	67	57	27	54	56	3	31	34	29	3.75	33	23	48.25	5.25	7
UDLM-35 ESSENTIAL	67	57	27	54	56	3	31	44.25	29	3.75	33	23	48.25	5.25	7
UDLM-50 ESSENTIAL	71	61	29.25	56.25	60.25	4.50	35	49.50	29	8	34	23	53	5.25	7