

## UDLM-30 ESSENTIAL TUMBLE DRYERS



### M PROGRAMMER

New M programmer: push buttons to control temperature and time



### OUTSTANDING FEATURES

Reversing drum action as standard  
Frequency inverter as standard  
Galvanized drum as standard



### EFFICIENCY

Big fluff filter



### VERSATILITY

Make to order - customization  
OPL > VENDED - Standard OPL model that can be easily changed to vended laundry.



### ERGONOMICS

Accessible lint filter.  
Large diameter doors.  
Door opening direction adjustable on site.



### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



### OTHERS

White painted panels  
COOL DOWN - anti-wrinkle at the end of the cycle  
Heating options: electric, gas and steam  
CE and ETL approved




### OPTIONS

- Opposite door opening
- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDLM-30 ESSENTIAL	
CAPACITY				
Capacity 1/18	lb	33		
Capacity 1/20	lb	30		
Hourly Output *	lb/h	66		
Evaporation capacity *	l/h	15.40		
DRUM				
Ø Drum	in	29.50		
Ø Door (load hole)	in	22.50		
Door center height	in	38.50		
Bottom center height	in	27		
Drum length	in	24		
Drum volume	cu ft	9.54		
POWER				
Drum motor power	hp	1/2		
Fan motor power	hp	0.33		
Electric heating power (elec.model)	kW	Not Available		
Total electric power (elec.model)	kW	Not Available		
Gas heating power	btu/h	70000		
Total electric power (gas model)	kW	0.67		
Steam heating power	kW	30		
Steam heating power	kW	0.67		
CONNECTIONS		ELECTRICAL		GAS
120 V / 60 Hz / 1	FLA	-	30	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	
Ø Gas inlet	BSP	1/2"		
Ø Steam inlet	BSP	3/4"		
Ø Condensed (Steam models)	BSP	3/4"		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	in	31 / 34		
Net Depth / Gross Depth	in	39 / 42.2		
Net Height / Gross Height	in	67 / 72.4		
Height without heating battery	in	-		
Net weight / Gross weight	lb	397 / 419		
OTHERS				
Max airflow	CFM	500		
Ø Fume exhaust	in	7.87		
Sound level	dB	64		

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

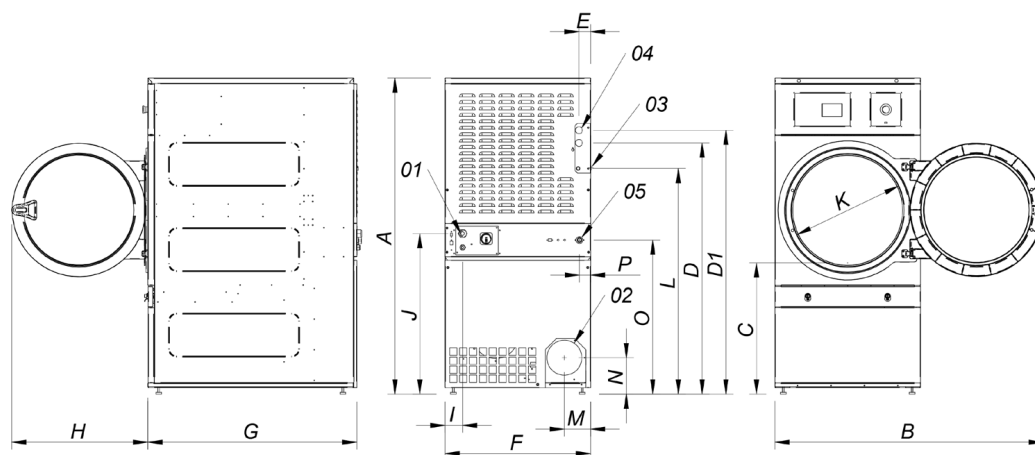

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø 7.87"
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

in	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
UDLM-30	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6