

## UDLM2-25 / UDLM2-25 ESSENTIAL STACK | TUMBLE DRYERS



### M PROGRAMMER

New M programmer: push buttons to control temperature and time



### OUTSTANDING FEATURES

Reversing drum action as standard  
Frequency inverter as standard  
Galvanized drum



### EFFICIENCY

Radial airflow  
Extra Large Steel Lint Filter



### VERSATILITY

Make to order - customization  
OPL > VENDED  
Standard OPL model that can be easily changed to vended laundry.



### ERGONOMICS

Accessible lint filter.  
Large diameter doors.  
Door opening direction adjustable on site.



### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, auto-test, data recovery for technicians and maintenance



### OTHERS

Transmission by direct drive  
COOL DOWN - anti-wrinkle at the end of the cycle  
CE and ETL approved  
Heating options: gas




### OPTIONS

- M Control programming console
- Rear panel external air + filter
- Wooden packing
- Exhaust silencer Ø 8"
- Ship voltage for electric models:  
440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	UDLM2 - 25	UDLM2 - 35		
<b>CAPACITY</b>					
Capacity 1/18	lb	2x25	2x40		
Capacity 1/20	lb	2x24	2x37		
Hourly Output*	lb/h	79	116		
Evaporation capacity*	l/h	16.5	18.6		
<b>DRUM</b>					
Ø Drum	in	29.50	29.50		
Ø Door	in	22.60	22.60		
Door center height	in	21.50 / 60	21.50 / 60		
Floor to door bottom	in	10.25 / 49	10.25 / 49		
Drum length	in	18.75	29.25		
Drum volume	cu ft	7.41	11.65		
<b>POWER</b>					
Drum motor power	hp	#!\$ j \$	#!\$ j \$		
Fan motor power	hp	0.33 x 2	0.33 x 2		
Electric heating power (electric model)	kW	Not Available	Not Available		
Total electric power (electric model)	kW	Not Available	Not Available		
Gas heating power	btu/h	41,000 x 2	41,000 x 2		
Total electric power (gas model)	kW	1.34	1.34		
<b>CONNECTIONS</b>		<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>
120 V / 60 Hz / 1	FLA	-	15A	-	15A
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-
Gas connection	in	-	1/2	-	1/2
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	in	31 / 34		31 / 34	
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52	
Net Height / Gross Height	in	78 / 84		78 / 84	
Net weight / Gross weight	lb	573.2 / 591		639.3 / 668	
<b>OTHERS</b>					
Max airflow	CFM	294 x 2		294 x 2	
Ø Duct Size	in	8		8	
Sound level	dB	64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

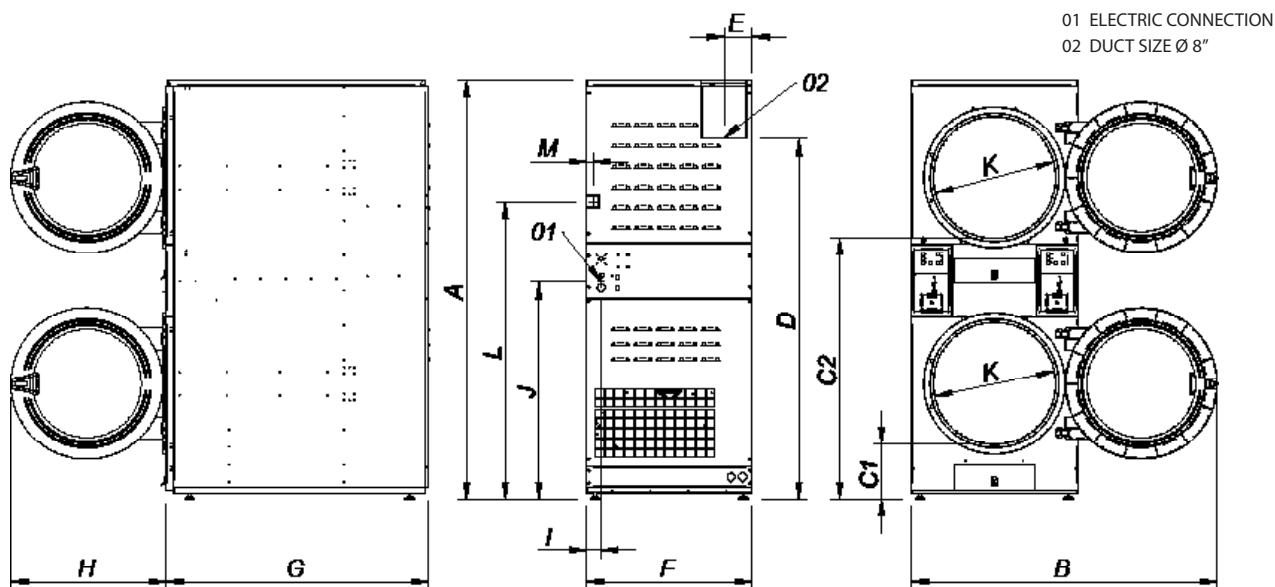

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
UDLM2-25	78	67	10	48.50	63.75	5.25	31	38.25	29	2.52	40.50	22.50	55.25	1.50
UDLM2-35	78	67	10	48.50	63.75	5.25	31	49	29	2.52	40.50	22.50	55.25	1.50