

UDTM 30 COMFORT TUMBLE DRYERS



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Extra Large Stainless Steel Lint Filter



VERSATILITY

Make to order - customization
OPL > COIN - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer-accessible stainless-steel lint filter Biggest door diameters
Door opening direction adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, auto-test, data recovery for technicians and maintenance with M console



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




OPTIONS

- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel front panel
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Wooden packing
- Ship voltage for electric models:
- 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDTM-30 COMFORT	
CAPACITY				
Capacity 1/18	lb	33		
Capacity 1/20	lb	30		
Hourly Output COMFORT*	lb/h	66		
Evaporation capacity COMFORT*	l/h	15.40		
DRUM				
Ø Drum	in	29.50		
Ø Door (load hole)	in	22.50		
Door center height	in	38.50		
Bottom center height	in	27		
Drum length	in	24		
Drum volume	cu ft	9.54		
POWER				
Drum motor power	HP	1/2		
Fan motor power COMFORT	HP	0.75		
Electric heating power ALL RANGES	kw	Not Available		
Total electric power (elec.model) DYN	kw	Not Available		
Gas heating power ALL RANGES	btu	70000		
Total electric power (gas model) DYN	kw	0.67		
Steam heating power ALL RANGES	kw	30		
Steam heating power (gas model) DYN	kw	0.67		
CONNECTIONS		ELECTRICAL	STEAM / GAS	
120 V / 60 Hz / 1	FLA	-	20	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	
Ø Gas inlet	BSP	1/2"		
Ø Steam inlet	BSP	3/4"		
Ø Condensed (Steam models)	BSP	3/4"		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	in	31 / 34		
Net Depth / Gross Depth	in	39 / 42.2		
Net Height / Gross Height	in	67 / 72.4		
Height without heating battery	in	-		
Net weight / Gross weight	lb	397 / 419		
OTHERS				
Max airflow COMFORT	CFM	706		
Ø Fume exhaust	in	7.87		
Sound level COMFORT	dB	64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

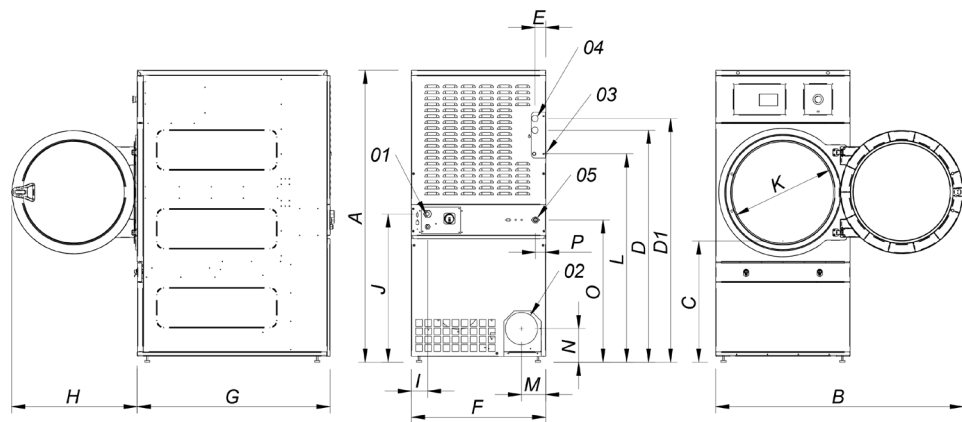

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø 7.87"
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

in	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
UDLM-30	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6