

UDTM-65/80 COMFORT TUMBLE DRYERS



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DUAL AIRFLOW - mixed axial-radial airflow
Extra Large Stainless Steel Lint Filter



VERSATILITY

Make to order - customization
OPL > VENDED - Standard OPL model easily transformable to coin laundry and viceversa



ERGONOMICS

Drawer-accessible stainless steel lint filter
Largest door diameters



MAINTENANCE

Hinged Front Panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes COOL
DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE and ETL approved




OPTIONS

- New M Control with display
- M Control programming console
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel steam battery
- Low pressure steam battery
- Wooden packing
- Exhaust silencer Ø 8"
- Ship voltage for electric models:
440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDTM - 65		UDTM - 80	
CAPACITY						
Capacity 1/18	lb	70		80		
Capacity 1/20	lb	60		75		
Hourly Output*	lb/h	131		141		
Evaporation capacity*	l/h	30.9		32.1		
DRUM						
Ø Drum	in	37.25		37.25		
Ø Door	in	31.50		31.50		
Door center height	in	41		41		
Load hole bottom height	in	64.50		64.50		
Drum length	in	30.75		36.85		
Drum volume	cu ft	19		23		
POWER						
Drum motor power	HP	0.75		0.75		
Fan motor power	HP	0.75		0.75		
Electric heating power	Kw	Not Available		Not Available		
Total electric power (elec.model)	Kw	Not Available		Not Available		
Gas heating power	BTU	140,000		140,000		
Total electric power (gas model)	Kw	1.15		1.15		
Steam heating power	kw	50.1		50.1		
Steam heating power (gas model)	kw	1.15		1.15		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	
120 V / 60 Hz / 1	FLA	-	30 A	-	30 A	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-	
Ø Gas inlet	BSP	1/2"		1/2"		
Ø Steam inlet	BSP	1"		1"		
Ø Condensed (Steam models)	BSP	1"		1"		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	in	38.75 / 42		38.75 / 42		
Net Depth / Gross Depth	in	41.50 / 45.50		47.60 / 51.60		
Net Height / Gross Height	in	76.60 / 82		76.60 / 82		
Height without heating battery	in	-		-		
Net weight / Gross weight	lb	507 / 573		573 / 628		
OTHERS						
Max airflow	CFM	706		706		
Ø Duct Size	in	8		8		
Sound level	dB	65		65		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

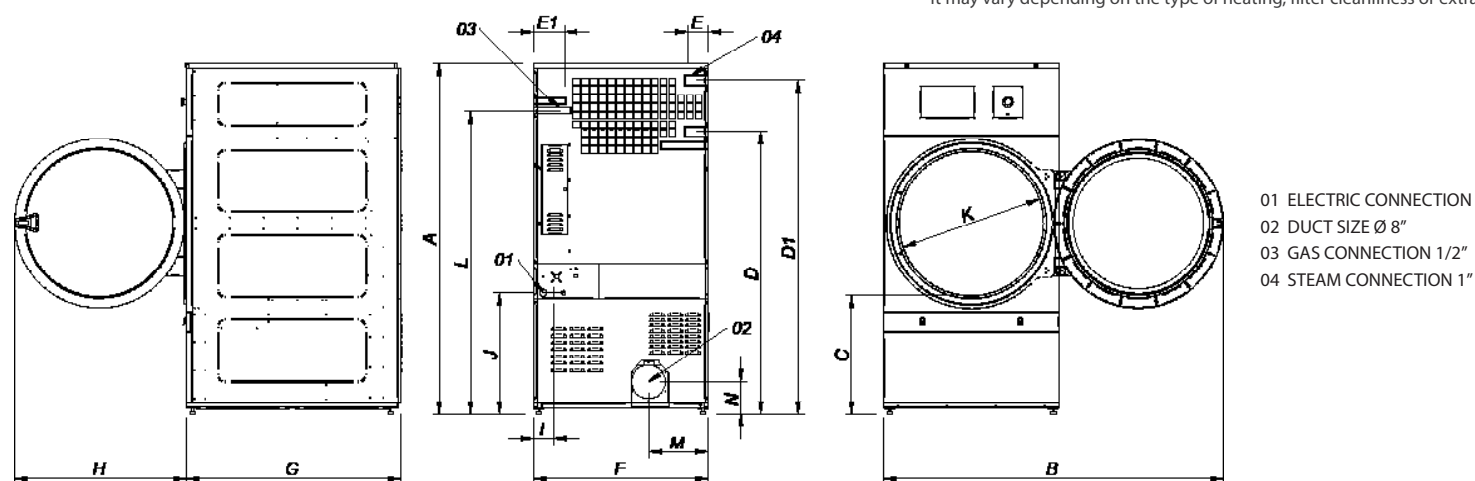

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N
UDTM-65	76.60	75	25	62.60	74	4.50	6.85	38.75	41.50	37.75	4.30	26.75	31.60	67.25	13.35	7
UDTM-80	76.60	75	25	62.60	74	4.50	6.85	38.75	47.60	37.75	4.30	26.75	31.60	67.25	13.35	7