

## UDTT-30 DYNAMIC TUMBLE DRYER



### TOUCH II

User friendly and totally programmable  
7" Touchscreen control.  
Program time-of-day promotions and discounts  
automatically.  
Works with any external payment system.  
USB Connection and PC software free of charge  
for programming, traceability, data analysis.  
Videos on display (ads, instructions, etc.)  
37 languages.



### OUTSTANDING FEATURES

Extra-smooth drum perforations.  
Reversing drum action.  
Frequency inverter.  
Transmission by direct drive.



### EFFICIENCY

DUAL AIRFLOW - mixed axial-radial airflow.  
Extra Large, stainless-steel lint filter.  
Anti-wrinkle feature at the end of the cycle.



### VERSATILITY

Make to order - customization.  
WET CLEANING ready.  
OPL <=> COIN - Standard OPL model that can be  
easily changed to vended laundry.



### CONNECTIVITY

IoT Domus Connect. Remote access.  
Management of laundries: OPL and COIN.  
Remote payment (coin laundry).



### ERGONOMICS

Accessible lint filter.  
Large diameter doors.  
Door opening direction adjustable on site.



### MAINTENANCE

Hinged panel to access control board.  
Easy and ergonomic access for service.  
Technical menu: statistics, alarm, auto test, data  
recovery.



### OTHERS

Easy-to-clean, skin-plate outer casing with  
stainless-steel look.  
CE and ETL approved.




### OPTIONS

- EFFICIENT DRY - Intelligent humidity control  
with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- DomusConnect-IoT communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models:  
440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDTT-30 DYNAMIC	
CAPACITY				
Capacity 1/18	lb	33		
Capacity 1/20	lb	30		
Hourly Output DYNAMIC*	lb/h	66		
Evaporation capacity DYNAMIC*	l/h	15.40		
DRUM				
Ø Drum	in	29.50		
Ø Drum door	in	22.60		
Door center height	in	38.50		
Bottom center height	in	27		
Drum depth	in	24		
Drum volume	cu ft	9.54		
POWER				
Drum motor power	HP	1/2		
Fan motor power DYNAMIC	HP	0.75		
Electric heating power (elec.model)	kW	Not Available		
Total electric power (elec.model) DYN	kW	Not Available		
Gas heating power	btu	70,000		
Total electric power (gas model) DYN	kW	0.67		
Steam heating power ALL RANGES	kW	30		
Steam heating power (gas model) DYN	kW	0.67		
CONNECTIONS		ELECTRICAL	STEAM / GAS	
120 V / 60 Hz / 1	FLA	-	20	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	
Gas connection	in	1/2"		
Ø Steam inlet	BSP	3/4"		
Ø Condensed (Steam models)	BSP	3/4"		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	in	30.9 / 34		
Net Depth / Gross Depth	in	38.9 / 42.2		
Net Height / Gross Height	in	66.7 / 72.4		
Height without heating battery	in	-		
Net weight / Gross weight	lb	397 / 419		
OTHERS				
Max airflow DYNAMIC	CFM	706		
Ø Fume exhaust	in	8		
Sound level DYNAMIC	dB	64		

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

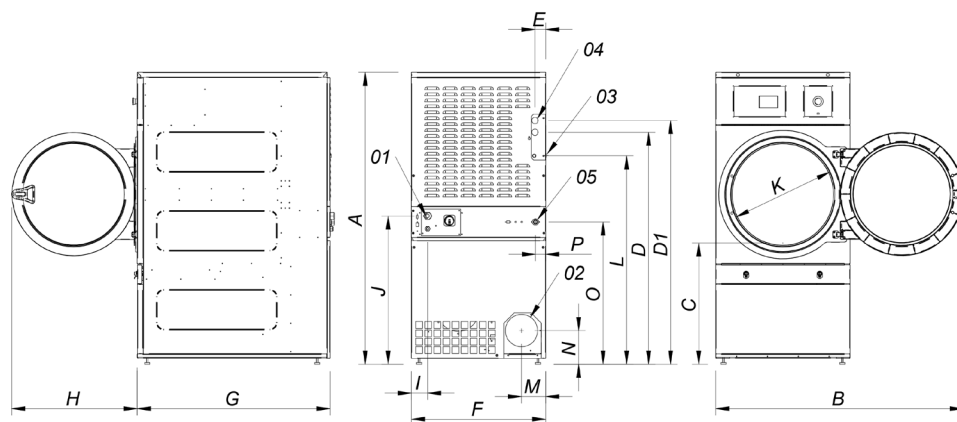

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø 8"
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

in	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
UDTT-30	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6