



TOUCH II

User friendly and totally programmable 7" Touch II
USB Connection. Online platform free of charge for
programming, telemetry, data analysis...thanks to
the IoT
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING



CONNECTIVITY

Standard IoT DomusKonnnect



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Large door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and main-
tenance with external console (with console option)



OTHERS

Steam battery in stainless steel (up to 15 bar pres-
sure)
Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




Automatic sliding door

OPTIONS

- EFFICIENT DRY - Humidity sensor
- Double doorglass
- SFEX - Fire Extinguishing System
- Opposite door opening
- Tropicalized model
- Dosing/spraying system
- Back panel external air + filter
- Stainless steel front and side panels
- Front panel in stainless steel
- Low pressure steam battery
- Maritime wooden packing
- Ship voltage for electric models:
440V 3 PH 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA		UDTT-100		UDTT-135		UDTT-180	
CAPACITY							
Capacity 1/18 // Capacity 1/20	Lb	17.6/ 98.8		147.3 //132.2		183.6 //132.5	
Hourly Output (electr. // gas)	Lb/h	177.2 /186.07		283.6 //317.5		300.8/413.4	
Evaporation capacity (electr. // gas)	l/h	45 // 48		64 // 72		68.2 // 93.8	
DRUM							
Ø Drum	In	48.22		48.22		48.22	
Ø Door	In	31.57		31.57		31.57	
Door center height	In	50.19		50.19		5.19	
Load hole bottom height	In	34.40		34.40		34.40	
Drum length	In	29.92		40.15		49.91	
Drum volume	cu ft	31.6		42.4		53.0	
POWER							
Drum motor power	Hp	1.005		1.4		2.01	
Fan motor power	Hp	1.47		1.47		1.47	
Electric heating power	kW	54		72		72	
Total electric power (elec.model)	kW	55.9		74.25		74.65	
Gas heating power	Btu/h	204.72		307.09		409.45	
Instant propane gas consumption (G31)	kg/h	5.14		7.71		10.28	
Instant natural gas consumption (G20)	m3/h	6.35		9.53		12.71	
Total electric power (gas model)	kW	1.9		2.25		2.65	
Steam heating power	kW	91.3		128		128	
Total electric power (steam model)	kW	1.9		2.25		2.65	
CONNECTIONS							
Voltage 230V - 1 PH + N + G	Nº x mm2 / A	-	-	-	-	-	-
Voltage 230V -3 PH + G	Nº x mm2 / A	-	4 x 2.5 / 20A	-	4 x 2.5 / 32A	-	4 x 2.5 / 32A
Tension 440V -3 PH + N + G	Nº x mm2 / A	5 x 35 /100A	5 x 1.5 / 20A	5 x 50 /125A	5 x 1.5 / 32A	5 x 50 /125A	5 x 1.5 / 32A
Ø Gas inlet	BSP	3/4"		3/4"		3/4"	
Net width / Gross width		50/52.4		50/52.4		50/52.4	
Net Depth / Gross Depth		43.6/46.7		53.8/56.9		63/67.2	
Net Height / Gross Height		93.8/84.7		93.8/84.7		93.8/84.7	
Height without heating		76.8		76.8		76.8	
Net weight / Gross weight		871.0/948.2		1166.4/1267.9		1448.7/267.9	
OTHERS							
Max airflow	CFM	1765.7		1765.7		1765.7	
Ø Fume exhaust	In	11.8		11.8		11.8	
Sound level	dB	67		67		67	

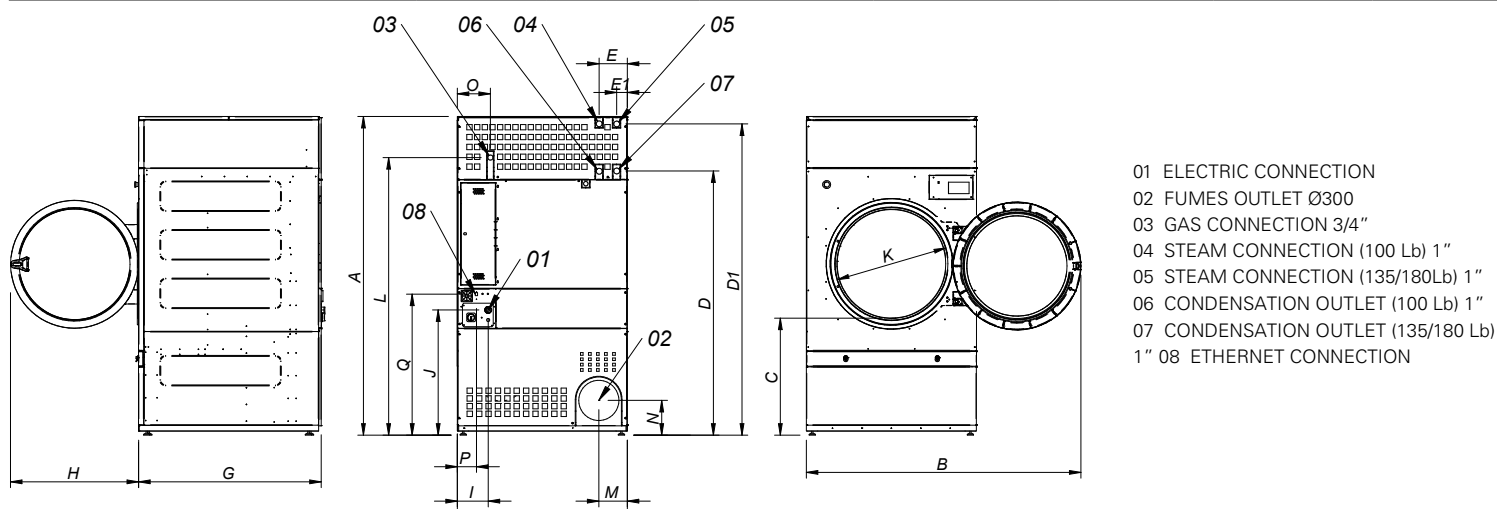

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q
UDTT-100	2380	2045	874	1981	2311	211	80	1270	1106	956	248	935	802	2088	214	240	244	160	1053
UDTT-135	2380	2045	874	1981	2311	211	80	1270	1366	956	248	935	802	2088	214	240	244	160	1053
UDTT-180	2380	2045	874	1981	2311	211	80	1270	1598	956	248	935	802	2088	214	240	244	160	1053

* Measurement with legs mounted 1.2 In)