

UDTT2-25 / UDTT2-35 STACK DYNAMIC TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 7" Touchscreen control.
Program time-of-day promotions and discounts automatically.
Works with any external payment system.
USB Connection and PC software free of charge for programming, traceability, data analysis.
Videos on display (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

Extra-smooth drum perforations.
Reversing drum action.
Frequency inverter.
Transmission by direct drive.



EFFICIENCY

DUAL AIRFLOW - mixed axial-radial airflow.
Extra Large, stainless-steel lint filter.
Anti-wrinkle feature at the end of the cycle.



VERSATILITY

Make to order - customization.
WET CLEANING ready.
OPL <=> COIN - Standard OPL model that can be easily changed to vended laundry.



CONNECTIVITY

IoT Domus Connect. Remote access.
Management of laundries: OPL and COIN.
Remote payment (coin laundry).



ERGONOMICS

Accessible lint filter.
Large diameter doors.
Door opening direction adjustable on site.



MAINTENANCE

Hinged panel to access control board.
Easy and ergonomic access for service.
Technical menu: statistics, alarm, auto test, data recovery.



OTHERS

Easy-to-clean, skin-plate outer casing with stainless-steel look.
CE and ETL approved.




OPTIONS

- EFFICIENT DRY - Intelligent humidity control with new drum inlet temperature control
- Double pane door glass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- DomusConnect communication kit
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Exhaust silencer Ø 8"
- Rear panel external air + filter
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	UDTT2 - 25		UDTT2 - 35	
CAPACITY						
Capacity 1/18	lb (kg)	25.8 (11.7) x 2		40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2		36.4 (16.5) x 2		
Production Output*	lb/h	76		80		
Evaporation capacity*	l/h	16.5		18.6		
DRUM						
Ø Drum	in	29.50		29.50		
Ø Door	in	22.60		22.60		
Door center height	in	21.50 / 60		21.50 / 60		
Door bottom height	in	10.2 / 48.6		10.2 / 48.6		
Drum depth	in	18.7		29.4		
Drum volume	cu ft	7.41		11.65		
POWER						
Drum motor power	HP	1/2 x 2		1/2 x 2		
Fan motor power	HP	0.33 x 2		0.33 x 2		
Electric heating power	kW	12 x 2		12 x 2		
Total electric power (elec.model)	kW	25.34		25.34		
Gas heating power	Btu/h	41,000 x 2		41,000 x 2		
Total electric power (gas model)	kW	1.34		1.34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A	
208-240 V / 50-60 Hz / 1	FLA	Not Available	-	Not Available	-	
208-240 V / 50-60 Hz / 3	FLA	Not Available	-	Not Available	-	
Gas connection	BSP	-	1/2"	-	1/2"	
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	in	31 / 34		31 / 34		
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52		
Net Height / Gross Height	in	78 / 84		78 / 84		
Net weight	lb	573		639.2		
OTHERS						
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2		
Ø Duct Size	in	8		8		
Sound level	dB	64		64		

* It may vary depending on the type of heating, filter cleanliness, or extraction type.

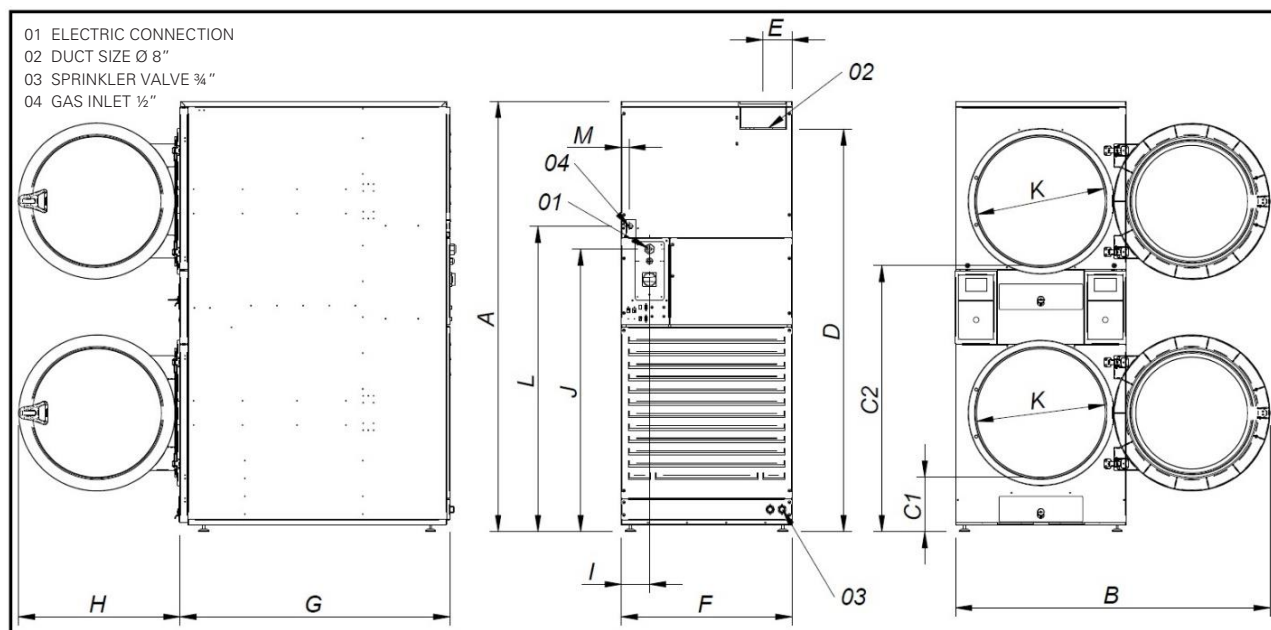

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
UDTT2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
UDTT2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40