

## UDTT ECO-ENERGY- 25/35/50 TUMBLE DRYERS



### TOUCH II

User friendly and totally programmable  
7" touchscreen control.  
Program time-of-day promotions and discounts automatically.  
Works with any external payment system.  
USB Connection and PC software free of charge for programming, traceability, data analysis. Videos on display (ads, instructions, etc.)  
37 languages.



### OUTSTANDING FEATURES

SFEX - Integrated Fire Extinguishing System  
SOFT DRY - Extra-smooth drum perforations.  
COOL DOWN - anti-wrinkle at the end of the cycle  
Stainless steel drum.  
Reversing drum action.  
Frequency inverter.  
Transmission by direct drive.



### EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With new drum inlet temperature control.  
AIR RE-CYCLE - Efficient air recirculation system  
THERMAL INSULATION - Complete air-flow circuit  
Double door glass  
FULL FLOW - New 'optimized' system of mixed airflow  
Big stainless-steel lint filter



### VERSATILITY

Make to order - customization.  
WET CLEANING ready.  
OPL <--> COIN - Standard OPL model that can be easily changed to vended laundry.



### CONNECTIVITY

IoT Domus Connect. Remote access.



### ERGONOMICS

Accessible lint filter.  
Large diameter doors.  
Door opening direction adjustable on site.



### MAINTENANCE

Hinged panel to access control board.  
Easy and ergonomic access for service.  
Technical menu: statistics, alarm, auto test, data recovery.



### OTHERS

Easy-to-clean, skin-plate outer casing with stainless-steel look.  
CE and ETL approved.




### OPTIONS

- DomusConnect communication kit
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Wooden packing
- Reverse door opening
- Exhaust silencer Ø 8"
- Rear panel external air + filter
- Ship voltage for electric models:  
440V III 50/60 Hz No N

| TECHNICAL DATA                    |       | UNIT.         | UDTT- 25 ECO ENERGY |               | UDTT- 35 ECO ENERGY |               | UDTT- 50 ECO ENERGY |  |
|-----------------------------------|-------|---------------|---------------------|---------------|---------------------|---------------|---------------------|--|
| CAPACITY                          |       |               |                     |               |                     |               |                     |  |
| Capacity 1/18                     | lb    | 26            |                     | 40            |                     | 60            |                     |  |
| Capacity 1/20                     | lb    | 25            |                     | 35            |                     | 50            |                     |  |
| Hourly Outpt *                    | lb/h  | 69            |                     | 74            |                     | 98            |                     |  |
| Evaporation Capacity *            | l/h   | 14.5          |                     | 16.3          |                     | 20.4          |                     |  |
| DRUM                              |       |               |                     |               |                     |               |                     |  |
| Ø Drum                            | in    | 29.50         |                     | 29.50         |                     | 33            |                     |  |
| Ø Door                            | in    | 22.50         |                     | 22.50         |                     | 22.50         |                     |  |
| Door Center Height                | in    | 38.50         |                     | 38.50         |                     | 40.50         |                     |  |
| Door Bottom Height                | in    | 27            |                     | 27            |                     | 29.25         |                     |  |
| Drum Depth                        | in    | 18.70         |                     | 29.30         |                     | 31.50         |                     |  |
| Drum Volume                       | cu ft | 7             |                     | 12            |                     | 17            |                     |  |
| POWER                             |       |               |                     |               |                     |               |                     |  |
| Drum motor power                  | HP    | 1/2           |                     | 1/2           |                     | 1/2           |                     |  |
| Fan motor power                   | HP    | 0.74          |                     | 0.74          |                     | 1             |                     |  |
| Electric heating power            | kw    | Not Available |                     | Not Available |                     | Not Available |                     |  |
| Total electric power (elec.model) | kw    | Not Available |                     | Not Available |                     | Not Available |                     |  |
| Gas heating power                 | BTU   | 70,000        |                     | 70,000        |                     | 105,000       |                     |  |
| Total electric power (gas model)  | kw    | 0.89          |                     | 0.89          |                     | 1.3           |                     |  |
| Steam heating power               | kw    | 40            |                     | 40            |                     | 66            |                     |  |
| Steam heating power (gas model)   | kw    | 0.89          |                     | 0.89          |                     | 1.3           |                     |  |
| CONNECTIONS                       |       | ELECTRICAL    | STEAM / GAS         | ELECTRICAL    | STEAM / GAS         | ELECTRICAL    | STEAM / GAS         |  |
| 120 V / 60 Hz / 1                 | FLA   | -             | 20                  | -             | 20                  | -             | 20                  |  |
| 208-240 V / 50-60 Hz / 1          | FLA   | Not Available | -                   | Not Available | -                   | Not Available | -                   |  |
| 208-240 V / 50-60 Hz / 3          | FLA   | Not Available | -                   | Not Available | -                   | Not Available | -                   |  |
| Ø Gas inlet                       | BSP   | 1/2"          |                     | 1/2"          |                     | 1/2"          |                     |  |
| Ø Steam inlet                     | BSP   | 3/4"          |                     | 3/4"          |                     | 1"            |                     |  |
| Ø Condensed (Steam models)        | BSP   | 3/4"          |                     | 3/4"          |                     | 1"            |                     |  |
| DIMENSIONS / PACKING DIMENSIONS   |       |               |                     |               |                     |               |                     |  |
| Net Width / Gross Width           | in    | 31 / 34       |                     | 31 / 34       |                     | 35 / 38       |                     |  |
| Net Depth / Gross Depth           | in    | 33 / 37       |                     | 44 / 48       |                     | 49 / 53       |                     |  |
| Net Height / Gross Height         | in    | 67 / 73       |                     | 67 / 73       |                     | 71 / 76       |                     |  |
| Height without heating battery    | in    | -             |                     | -             |                     | -             |                     |  |
| Net weight / Gross weight         | lb    | 379 / 396     |                     | 412 / 440     |                     | 462 / 485     |                     |  |
| OTHERS                            |       |               |                     |               |                     |               |                     |  |
| Max airflow COMFORT               | CFM   | 706           |                     | 706           |                     | 882           |                     |  |
| Ø Duct Size                       | in    | 8             |                     | 8             |                     | 8             |                     |  |
| Sound level COMFORT               | dB    | 64            |                     | 64            |                     | 65            |                     |  |

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

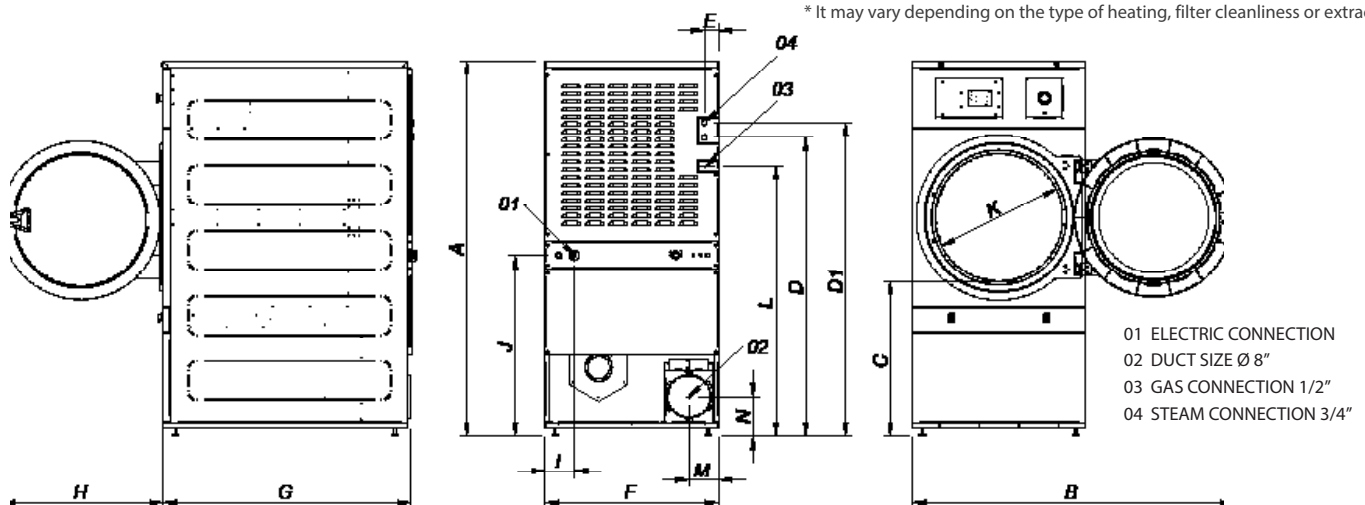

|                    |    | A  | B  | C     | D     | D1    | E    | F  | G     | H  | I    | J  | K  | L     | M    | N |
|--------------------|----|----|----|-------|-------|-------|------|----|-------|----|------|----|----|-------|------|---|
| UDTT-25 ECO ENERGY | in | 67 | 57 | 27    | 54    | 56    | 3    | 31 | 34    | 29 | 3.75 | 33 | 23 | 48.25 | 5.25 | 7 |
| UDTT-35 ECO ENERGY | in | 67 | 57 | 27    | 54    | 56    | 3    | 31 | 44.25 | 29 | 3.75 | 33 | 23 | 48.25 | 5.25 | 7 |
| UDTT-50 ECO ENERGY | in | 71 | 61 | 29.25 | 56.25 | 60.25 | 4.50 | 35 | 49.50 | 29 | 8    | 34 | 23 | 53    | 5.25 | 7 |