

UDTT-30 ECO-ENERGY TUMBLE DRYER



TOUCH II

User friendly and totally programmable
7" touchscreen control.
Program time-of-day promotions and discounts
automatically.
Works with any external payment system.
USB Connection and PC software free of charge for
programming, traceability, data analysis. Videos on
display (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

SFEX - Integrated Fire Extinguishing System
SOFT DRY - Extra-smooth drum perforations.
COOL DOWN - anti-wrinkle at the end of the cycle
Stainless steel drum.
Reversing drum action.
Frequency inverter.
Transmission by direct drive.



EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With new
drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system
THERMAL INSULATION - Complete air-flow circuit
Double door glass
FULL FLOW - New 'optimized' system of mixed airflow
Big stainless-steel lint filter



VERSATILITY

Make to order - customization.
WET CLEANING ready.
OPL <--> COIN - Standard OPL model that can be easily
changed to vended laundry.



CONNECTIVITY

IoT Domus Connect. Remote access.



ERGONOMICS

Accessible lint filter.
Large diameter doors.
Door opening direction adjustable on site.



MAINTENANCE

Hinged panel to access control board.
Easy and ergonomic access for service.
Technical menu: statistics, alarm, auto test, data
recovery.



OTHERS

Easy-to-clean, skin-plate outer casing with
stainless-steel look.
CE and ETL approved.




OPTIONS

- New dosing/vaporizing system
- DomusConnect communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel battery
- Low pressure steam battery
- Wooden packing
- Reverse door opening
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models:
- 440V III 50/60 Hz No N

TECHNICAL DATA		UNIT.	UDTT-30 ECO-ENERGY	
CAPACITY				
Capacity 1/18	lb	33		
Capacity 1/20	lb	30		
Hourly Output ECO-ENERGY*	lb/h	66.7		
Evaporation capacity ECO-ENERGY*	l/h	15.6		
DRUM				
Ø Drum	in	29.50		
Ø Door (load hole)	in	22.50		
Door center height	in	38.50		
Load hole bottom height	in	27		
Drum length	in	24		
Drum volume	cu ft	9.54		
POWER				
Drum motor power	HP	1/2		
Fan motor power ECO-ENERGY	HP	0.75		
Electric heating power ALL RANGES	kw	Not Available		
Total electric power (elec.model) ECO-ENERGY	kw	Not Available		
Gas heating power ALL RANGES	btu	70,000		
Total electric power (gas model) ECO-ENERGY	kw	0.67		
Steam heating power ALL RANGES	kw	30		
Steam heating power (gas model) ECO-ENERGY	kw	0.67		
CONNECTIONS		ELECTRICAL		STEAM / GAS
120 V / 60 Hz / 1	FLA	-		20
208-240 V / 50-60 Hz	FLA	Not Available		-
208-240 V / 50-60 Hz / 3	FLA	Not Available		-
Gas connection	┐	1/2"		
Ø Steam inlet	4EB	3/4"		
Ø Condensed (Steam models)	4EB	3/4"		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	in	31 / 34		
Net Depth / Gross Depth	in	39 / 42.2		
Net Height / Gross Height	in	67 / 72.4		
Height without heating battery	in	-		
Net weight / Gross weight	lb	397 / 419		
OTHERS				
Max airflow ECO-ENERGY	m3/h	1200		
Ø Fume exhaust	in	7.87		
Sound level ECO-ENERGY	dB	64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

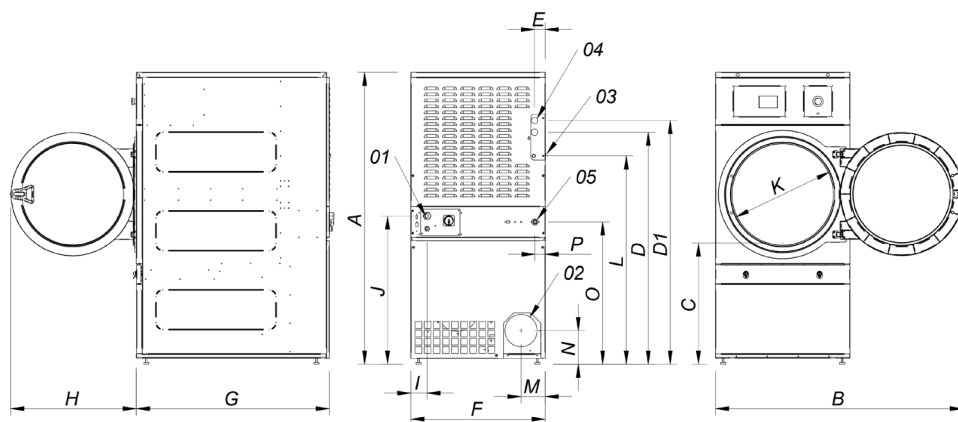

- 01 POWER SUPPLY
- 02 FUMES OUTLET Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

in	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
UDTT-30 EE	66.7	57.0	27.1	53.3	56.0	2.7	2.7	30.9	38.9	28.9	3.7	34.3	22.6	48.3	5.2	7.1	32.7	2.6