



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Frequency inverter as standard
Galvanized drum as standard



VERSATILITY

Make to order - Customization
OPL > Multi-vending - Standard OPL model easily to convert to coin laundry uses



ERGONOMICS

Lint drawer filter, stainless steel mesh
Large door diameters



MAINTENANCE

Hinged control panel for easy access



OTHERS

COOL DOWN - anti-wrinkle at the end of the cycle Heating
options: electric, gas
ETL-CE approved




OPTIONS

- Screen in M programmer (2 units)



- Ship voltage for electric models: 440V 3PH 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA	UNIT.	UDLM2-50
CAPACITY		
Capacity 1/18	Lbs.	55 X 2
Capacity 1/20	Lbs.	50 x2
Hourly Output (gas)	Lbs/h	194
Evaporation capacity (gas)	Lbs/h	44
DRUM		
Ø Drum	In	32.87
Ø Door	In	22.59
Door center height	In	21.6 / 63.7
Door bottom height	In	10.70 /52.04
Drum Depth	In	31.49
Drum volume	CU FT	15.46
POWER		
Drum motor power	Hp	0.5 x 2
Fan motor power	Hp	0.75 x 2
Electric heating power	kW	-
Total electric power (elec.model)	kW	-
Gas heating power	Btu/h	105776 x 2
Instant propane gas consumption (G31)	kg/h	1.03 x 2
Instant natural gas consumption (G20)	m3/h	1.27 x 2
Total electric power (gas model)	kW	1,94
CONNECTIONS		
		GAS
Voltage 230V - 1PH + N + G	Nº x mm2 / A	3 x 1.5 / 20A
Voltage 230V -3PH + G	Nº x mm2 / A	-
Voltage 440V - 3PH + N + G	Nº x mm2 / A	-
Ø Gas inlet	BSP	3/4"
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	In	34.3/37.4
Net Depth / Gross Depth	In	52.3/ 55.6
Net Height / Gross Height	In	83.4/ 88.7
Net weight / Gross weight	Lb	824.7/ 868.8
OTHERS		
Max airflow	CFM	529.7 x 2
Ø Vent Exhaust	In	10
Sound level	dB	69

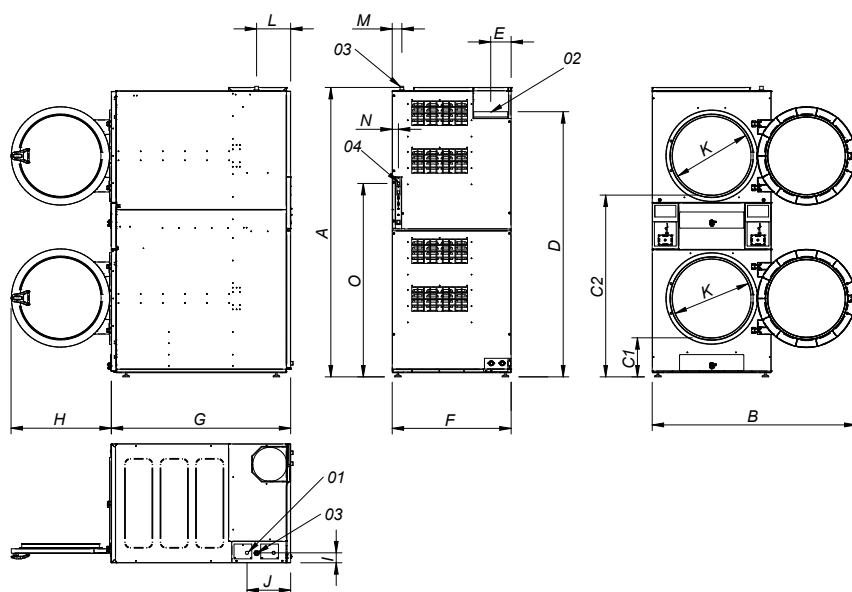

- 01** ELECTRIC CONNECTION
- 02** FUMES OUTLET Ø250
- 03** GAS INLET 3/4
- 04** ETHERNET CONNECTION (only available CONTROL TOUCH II models)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
UDLM2-50	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	45	1416

* Measurement with legs mounted (1.18 In)