



TUMBLE
DRYERS

GREEN
EVOLUTION

FAGOR
FAGOR INDUSTRIAL



Stack Dryers

FD-2-25-TP2

FD-2-35-TP2

ADVANCE

HIGH PERFORMANCE, EFFICIENT
TECNOLOGY, ADVANCE DRYING

TOUCH
PLUS
CONTROL

STAINLESS
STEEL DRUM

MIXED
FLOW

SOFT
TOUCH


AUTOREVERSE
DRUM

873FGD7E

- User friendly and totally programmable microprocessor with a 7" **Touch II screen**
- USB Connection to upload programming or download traceability, data analysis. You can program time of the day promotions and discounts automatically.
- Videos shown on display: ads, instructions (useful for coin laundry)



- Anti-wrinkle system.
- End of cycle tone.
- Emergency stop button and security micro magnet to stop operation.
- Drum motion by direct drive-gearbox transmission.
- Automatic reverse rotation of the drum.
- Frequency inverter for smoother operation.
- OPL ↔ Vended Fagor dryers can be easily converted from OPL to Self-Service and viceversa.



- Easy-to-clean, outer casing in gray skin-plate with stainless steel look.
- Ergonomic big loading door with a 180° opening and the option of double glazing.
- Stainless steel drum.
- Axial-radial airflow, resulting in greater drying efficiency.
- Drum with special smooth perforations for the gentle treatment of fabrics.
- Stainless steel lint filter at the bottom for more ergonomic, larger, and improved airflow.

OPTIONS:

- iDry System (Intelligent moisture sensor)
- FK System (Integrated fire prevention system).
- Double door-glass.
- Stainless steel side panels.
- Stainless steel front panel.



ONNERA GROUP


www.fagorcommercial.com

ONNERA USA, Inc
13105 NW 47th Ave
Opa-locka, Florida 33054
USA



TECHNICAL DATA		UNIT.	FD2 - 25 TP2		FD2 - 35 TP2	
CAPACITY						
Capacity 1/18	lb (kg)	25.8 (11.7) x 2		40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2		36.4 (16.5) x 2		
Production Output*	lb/h	76		80		
Evaporation capacity*	l/h	16.5		18.6		
DRUM						
Ø Drum	in	29.50		29.50		
Ø Door	in	22.60		22.60		
Door center height	in	21.50 / 60		21.50 / 60		
Door bottom height	in	10.2 / 48.6		10.2 / 48.6		
Drum depth	in	18.7		29.4		
Drum volume	cu ft	7.41		11.65		
POWER						
Drum motor power	HP	1 x 2		1 x 2		
Fan motor power	HP	0.33 x 2		0.33 x 2		
Electric heating power	kW	12 x 2		12 x 2		
Total electric power (elec.model)	kW	25.34		25.34		
Gas heating power	Btu/h	41,000 x 2		41,000 x 2		
Total electric power (gas model)	kW	1.34		1.34		
CONNECTIONS		ELECTRIC.		GAS		
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A	
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-	
Gas connection	in	-	0.50	-	0.50	
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	in	31 / 34		31 / 34		
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52		
Net Height / Gross Height	in	78 / 84		78 / 84		
Net weight	lb	573		639.2		
OTHERS						
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2		
Ø Duct Size	in	8		8		
Sound level	dB	64		64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

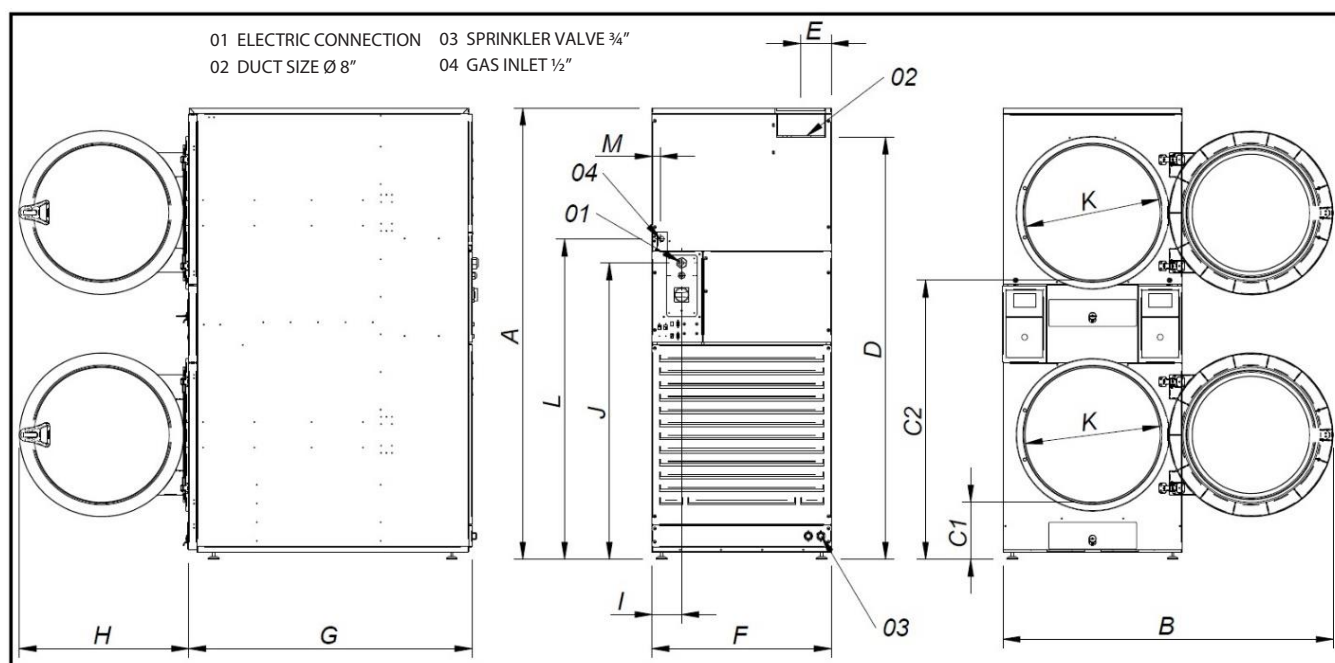

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FD2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
FD2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40



TUMBLE
DRYERS

GREEN
EVOLUTION

FAGOR 
FAGOR INDUSTRIAL



Stack Dryers

FD-2-25 M

FD-2-35 M

CONCEPT

THE PERFECT BALANCE BETWEEN
HIGH QUALITY AND PRICE



873FGD7E

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity; avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Drum motion by direct drive-gearbox transmission.
- Filter drawer with wide surface and improved airflow made of stainless steel. Standard filter diameter is 0,3 mm.

OPL ↔ Vended

- Fagor dryers can be easily converted from OPL to vended and viceversa.



- Stainless Steel Drum.
- Soft Touch: Drum with special smooth perforations for the gentle treatment of fabrics.
- Mixed Flow: the system of mixed axial-radial airflow increases the efficiency of the whole drying process due to the improvement of the air-flow inside the drum.
- Cool Down: anti-wrinkle at the end of cycle.
- Ergonomic big loading door with a 180° opening and the option of double glazing.
- Easy-to-clean, outer casing in gray skin-plate with stainless steel look.

- **M Control** : easy and intuitive electronic control with time and temperature selection.
- “Coin ready” M control is ready for the vended laundry. Compatible with almost all payment options.



Add the optional external console or the easy display for more control of the process:

- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.

OPTIONS:

- Double door-glass.
- Stainless steel side panels.
- Stainless steel front panel.
- Display for time, temperature and program.
- External programmer.




ONNERA GROUP

www.fagorcommercial.com

ONNERA USA, Inc.
13105 NW 47th Ave
Opa-locka, Florida 33054
USA

TECHNICAL DATA		UNIT.	FD2 - 25 M		FD2 - 35 M	
CAPACITY						
Capacity 1/18	lb (kg)	25.8 (11.7) x 2		40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2		36.4 (16.5) x 2		
Production Output*	lb/h	76		80		
Evaporation capacity*	l/h	16.5		18.6		
DRUM						
Ø Drum	in	29.50		29.50		
Ø Door	in	22.60		22.60		
Door center height	in	21.50 / 60		21.50 / 60		
Door bottom height	in	10.2 / 48.6		10.2 / 48.6		
Drum depth	in	18.7		29.4		
Drum volume	cu ft	7.41		11.65		
POWER						
Drum motor power	HP	1/2 x 2		1/2 x 2		
Fan motor power	HP	0.33 x 2		0.33 x 2		
Electric heating power	kW	Not Available		Not Available		
Total electric power (elec.model)	kW	Not Available		Not Available		
Gas heating power	Btu/h	41,000 x 2		41,000 x 2		
Total electric power (gas model)	kW	1.34		1.34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A	
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-	
Gas connection	in	-	0.50	-	0.50	
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	in	31 / 34		31 / 34		
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52		
Net Height / Gross Height	in	78 / 84		78 / 84		
Net weight	lb	573		639.2		
OTHERS						
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2		
Ø Duct Size	in	8		8		
Sound level	dB	64		64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

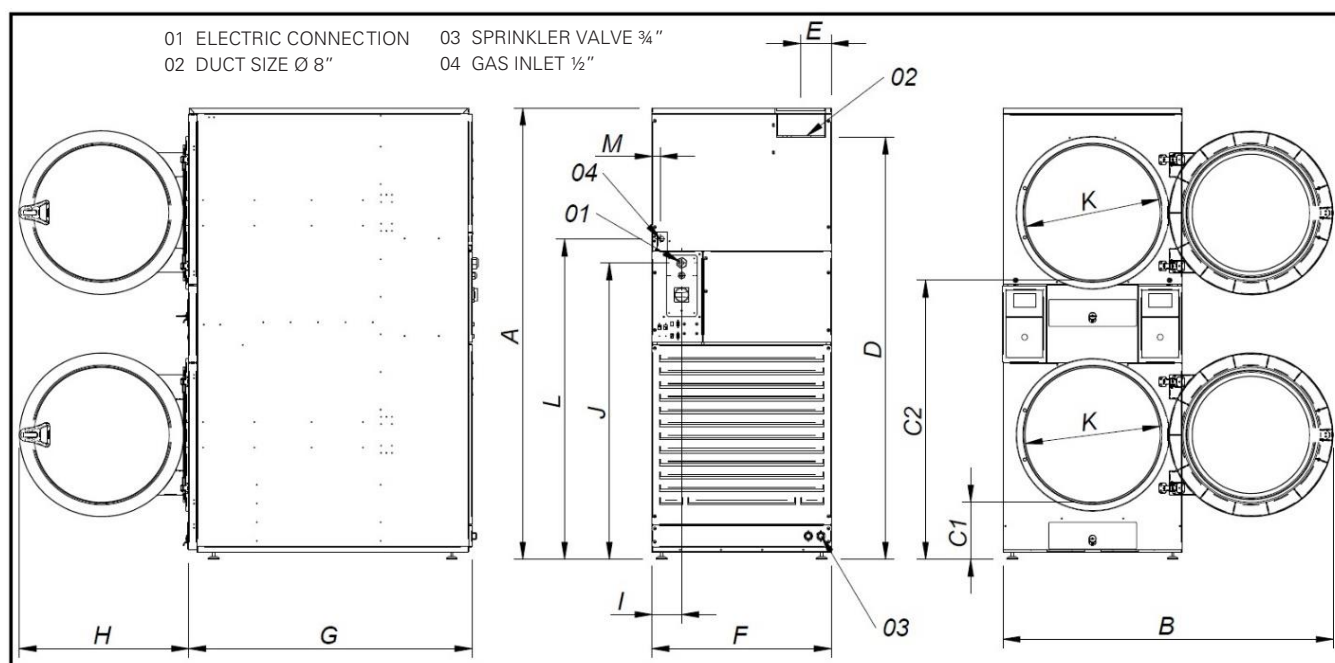

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FD2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
FD2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40



TUMBLE
DRYERS

GREEN
EVOLUTION

FAGOR 
FAGOR INDUSTRIAL



Stack Dryers

FED2-25-35

Economic Line

SIMPLE BUT WITH THE SAME
PERFORMANCE AND ROBUSTNESS

AUTOREVERSE
DRUM

EASY
CONTROL

873FGD7E

- Auto-reverse Drum: the drying process is more efficient; offers better uniformity, avoiding the tangling of big pieces.
- Frequency inverter: controls rotating speed and reverse drum action.
- Drum motion by direct drive-gearbox transmission.

- OPL ↔ Vended

Fagor dryers can be easily converted from OPL to Vended and vice versa.



- Cool Down: Anti-wrinkle at the end of cycle.
- Filter drawer with wide surface and improved airflow made of stainless steel.
- Outer casing in White painted galvanized steel.
- Radial airflow circuit.
- Ergonomic big loading door with a 180° opening.

- **M Control**: easy and intuitive electronic control with time and temperature selection.
- "Coin ready" M control is ready for the vended laundry. Compatible with almost all payment options.



Add the optional external console or the easy display for more control of the process:

- Up 10 programs.
- Drum speed.
- Statistics.
- Technical menu.

OPTIONS:

- Optional screen to view time, temperature and program (up to 3 programs). The technical menu can also be accessed without having to use the console.




ONNERA GROUP

www.fagorcommercial.com

ONNERA USA, Inc.
13105 NW 47th Ave
Opa-locka, Florida 33054
USA

TECHNICAL DATA		UNIT.	FED2 - 25 M		FED2 - 35 M	
CAPACITY						
Capacity 1/18	lb (kg)	25.8 (11.7) x 2		40.3 (18.3) x 2		
Capacity 1/20	lb (kg)	23.1 (10.5) x 2		36.4 (16.5) x 2		
Production Output*	lb/h	76		80		
Evaporation capacity*	l/h	16.5		18.6		
DRUM						
Ø Drum	in	29.50		29.50		
Ø Door	in	22.60		22.60		
Door center height	in	21.50 / 60		21.50 / 60		
Door bottom height	in	10.2 / 48.6		10.2 / 48.6		
Drum depth	in	18.7		29.4		
Drum volume	cu ft	7.41		11.65		
POWER						
Drum motor power	HP	1/2 x 2		1/2 x 2		
Fan motor power	HP	0.33 x 2		0.33 x 2		
Electric heating power	kW	Not Available		Not Available		
Total electric power (elec.model)	kW	Not Available		Not Available		
Gas heating power	Btu/h	41,000 x 2		41,000 x 2		
Total electric power (gas model)	kW	1.34		1.34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	
120 V / 60 Hz / 1	FLA	-	15 A	-	15 A	
208-240 V / 50-60 Hz / 1 / 3	FLA	Not Available	-	Not Available	-	
Gas connection	in	-	0.50	-	0.50	
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	in	31 / 34		31 / 34		
Net Depth / Gross Depth	in	38.25 / 41.50		49 / 52		
Net Height / Gross Height	in	78 / 84		78 / 84		
Net weight	lb	573		639.2		
OTHERS						
Max airflow	CFM (m3/h)	294.29 (500) x2		294.29 (500) x2		
Ø Duct Size	in	8		8		
Sound level	dB	64		64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

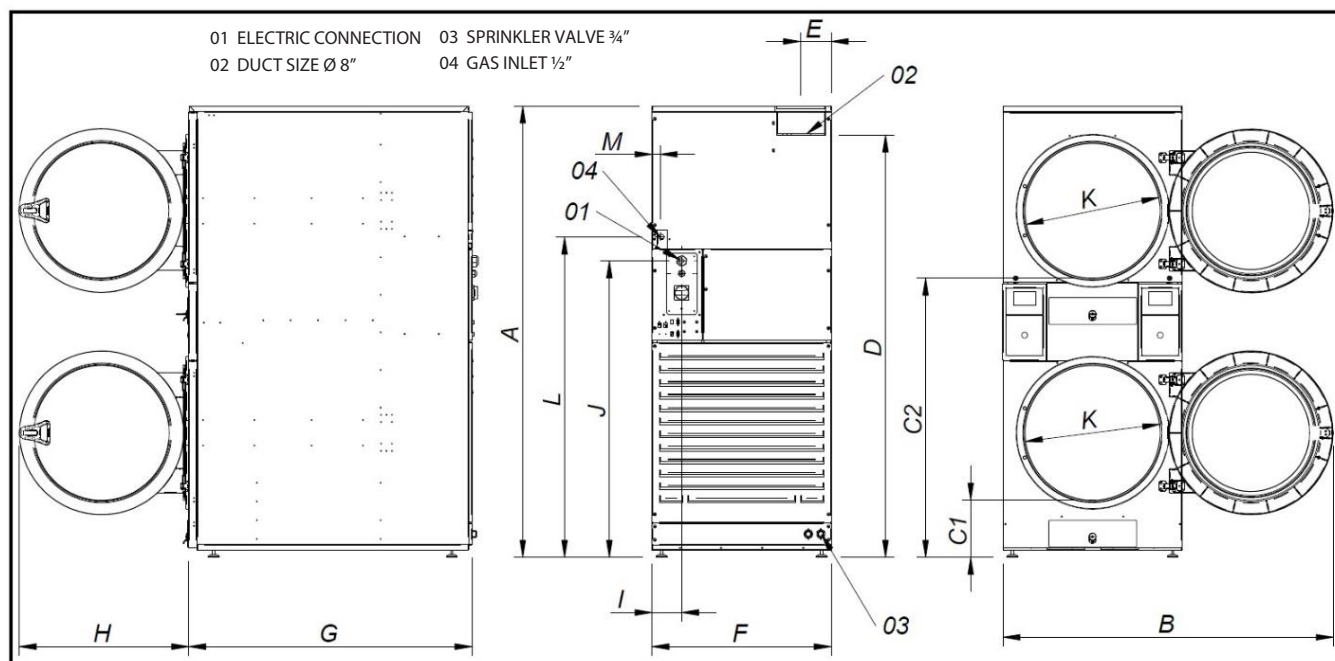

DIMENSIONS (in)	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
FED2-25	78	57	10.2	48.60	63.75	5.25	31	38.25	29	5.11	50.20	22.60	55.70	1.40
FED2-35	78	57	10.2	48.60	63.75	5.25	31	48.90	29	5.11	50.20	22.60	55.70	1.40