

CW10 | CD10



Professional Washer and Dryer

FEATURES WASHER

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Standard with drain pump
- Top, front and side panels standard available in anthracite grey
- Electrical heating or boiler-fed
- 6 wash programs
- Led indication of the status of the program
- Time remaining countdown

FEATURES DRYER

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening 180° for easy loading and unloading
- Top, front and side panels standard available in anthracite grey
- Electrical or gas heating
- 4 drying programs
- Led indication of the status of the program
- Time remaining countdown



HIGH EXTRACTION SPEED
For shorter drying cycles
and saving the energy



USER-FRIENDLY
Very simple and intuitive
interface



COMPACT DESIGN
Saving the footprint



CW10 | Front load washer

NF3JGBSP403UG01 NF3JGBJP403UG43 NF3JGBSG403UG01 NF3NGBJG403UG44 - MOP - NF3JGBSP403NC22

Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE	No agency
Actuation	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²
Basket	Stainless	Soap inject./grey boot	Stainless	Soap inject./grey boot	Stainless
Drain	Pump	Pump	Gravity drain	Gravity drain	Pump
Capacity	10.5 kg	10.5 kg	10.5 kg	10.5 kg	10.5 kg

CD10 | Dryer

ND3NGBCS403UG01

NDENGBCS303UG01


NDGNGBCS303UG01

Market	Europe/CE	Europe/CE	Europe/CE
Actuation	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²
Heating	Electric*	Electric*	Gas
El. connection	400V/50Hz/3N	230V/50Hz/1N	230V/50Hz/1N


¹On Premise Laundry ²Prep for Central Pay

CW10		
Drum volume	I	96,8
MOTOR		
Frequency controlled	kW	0,67
Extraction speed	rpm	1200
G-factor		440
ELECTRICAL CONNECTION		400v/50Hz/3N
ELECTRICAL HEATING	kW	4,8
DIMENSIONS H×W×D	mm	1027x683x704
Net weight	kg	113
Volume (packed)	m ³	0,71
Packed H×W×D	mm	1150x760x860
Gross weight	kg	122


CD10		
Capacity	kg	10,5
Drum volume	I	198
ELECTRICAL HEATING		5,2 (230V), 5,3 (400V)*
GAS HEATING	kW	7,3
MOTOR POWER	rpm	0,25
Exhaust	mm	102
DIMENSIONS H×W×D	mm	1027x683x711
Net weight	kg	68
Volume (packed)	m ³	0,71
Packed H×W×D	mm	1150x760x860
Gross weight	kg	73

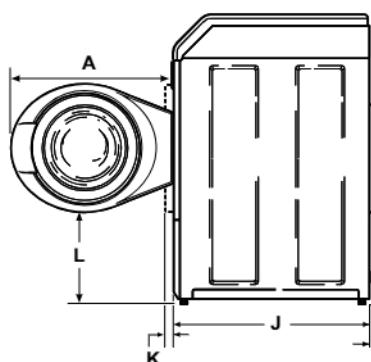

CW10 Side

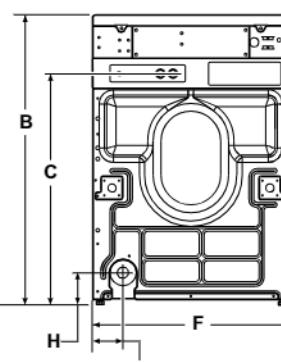


CW10 Back




CW10 Front


CW10	A	B	C	D	E	F	G	H	I	J	K	L
	611	1027	813	1006	371	683	107	104	52	704	40	333
	H					W			D			

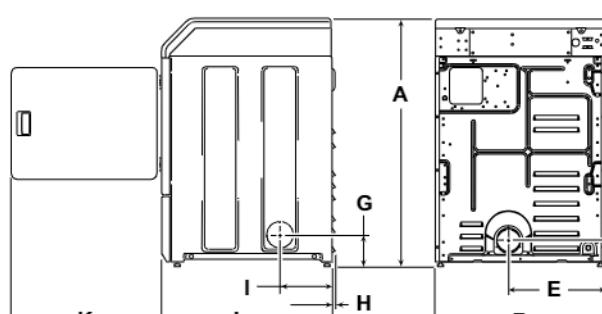

CD10 Side



CD10 Back



CD10 Front

CD10	A	B	C	D	E	F	G	H	I	J	K
	1027	1006	392	102	391	683	114	10	203	711	597
	H					W			D		