

Professional Stacked washer-dryer and stacked dryer

FEATURES STACK UNITS

- Fully programmable control
- Totally freestanding: can be installed on any floor and any level
- Reduced floor space
- Top, front and side panels standard available in anthracite grey
- Door opens 180° for easy loading and unloading
- LED notification of the status of the program
- Programmable by Infra Red
- Time remaining countdown

more moisture, minimizing drying times and utility costs

- Suspension with new out-of-balance logic
- Soap box with four compartments
- Drain pump or drain valve
- Electrical heating or boiler-fed
- Soap supply injection allows easy connection with liquid soap pumps
- Longer lifetime: at least 15,000 cycles

FEATURES WASHER

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes

FEATURES DRYER

- Galvanized steel drum
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Electrical or gas heating



COMPACT DESIGN

Saving the footprint



USER-FRIENDLY

Very simple and intuitive interface



LARGE DOOR OPENING

For easy loading and unloading




CS10 | Stacked washer-dryer

NT3JGASP403UG01 NT3JGAJP403UG43 NT3JGAJG403UG43 NT3JGASP403NG22 NT2JGASP403UG01

Market	Europe/CE	Europe/CE	Europe/CE	No agency	Europe/CE
Actuation	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²	OPL/PCP ²
Heating	Electric	Electric	Electric	Electric	Electric W - Gas D
Voltage	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N
Basket	Stainless	Soap. inject./grey boot	Soap. inject./grey boot	Stainless	Stainless
Drain	Pump	Pump	Gravity drain ³	Pump	Pump

¹On Premise Laundry ²Prep for Central Pay ³Available in Q4/2024

CS10		
Stacked washer-dryer		
Capacity	kg	10,5
DRUM VOLUME	l	Dryer: 198 Washer: 96,8
Frequency controlled	kW	0,67
Extraction speed	rpm	Washer: 1200 Washer 440
G-FACTOR		
ELECTRICAL HEATING	kW	Dryer: 5,2 (230V) 5,3 (400V)
GAS HEATING	kW	Dryer: 7,3
MOTOR POWER	kW	Dryer: 0,25
HEATING		3 pH W, 3 ph D
VOLTAGE		400V/50Hz/3N
CONTROL TYPE		Quantum
BASKET		Stainless/Galvanized
DIMENSIONS H×W×D	mm	1986x683x704
Net weight	kg	177
Volume (packed)	m ³	1,25
PACKED H×W×D	mm	2032x760x860
Gross weight	kg	193

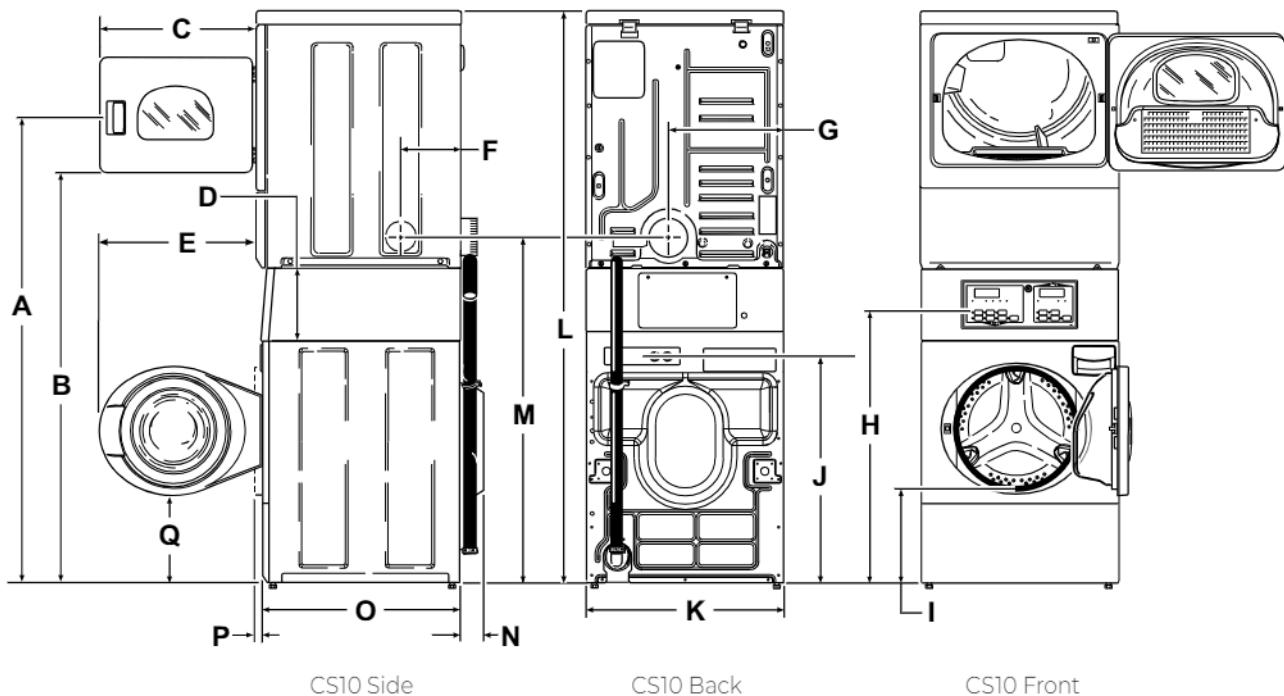

CS10	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
	1678	1447	597	213	610	203	391	938	371	813	683	1986	1184	52	704	38	333

W H D

CDS10 | Stacked dryer-dryer

NS3NGAGS403UG01

NSGNGAGS303UG01


Market	Europe/CE
Actuation	OPL/PCP ²
Exhaust (mm)	102
Voltage	400v/50Hz/3N
Heating	Electric

Europe/CE
OPL/PCP ²
102
230v/50Hz/1N
Gas

¹On Premise Laundry ²Prep for Central Pay

CDS10 Stacked dryer-dryer

Capacity	kg	10,5
DRUM VOLUME	l	198
ELECTRICAL HEATING	kW	5,2 (230V) 5,3 (400V)
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25
CONTROL TYPE		Quantum
COLOR		Grey
DIMENSIONS H×W×D	mm	1986x683x737
Net weight	kg	120 (el.) / 125 (gas)
Volume (packed)	m ³	1,30
PACKED H×W×D	mm	2032x760x860
Gross weight	kg	127 (el.) / 132 (gas)

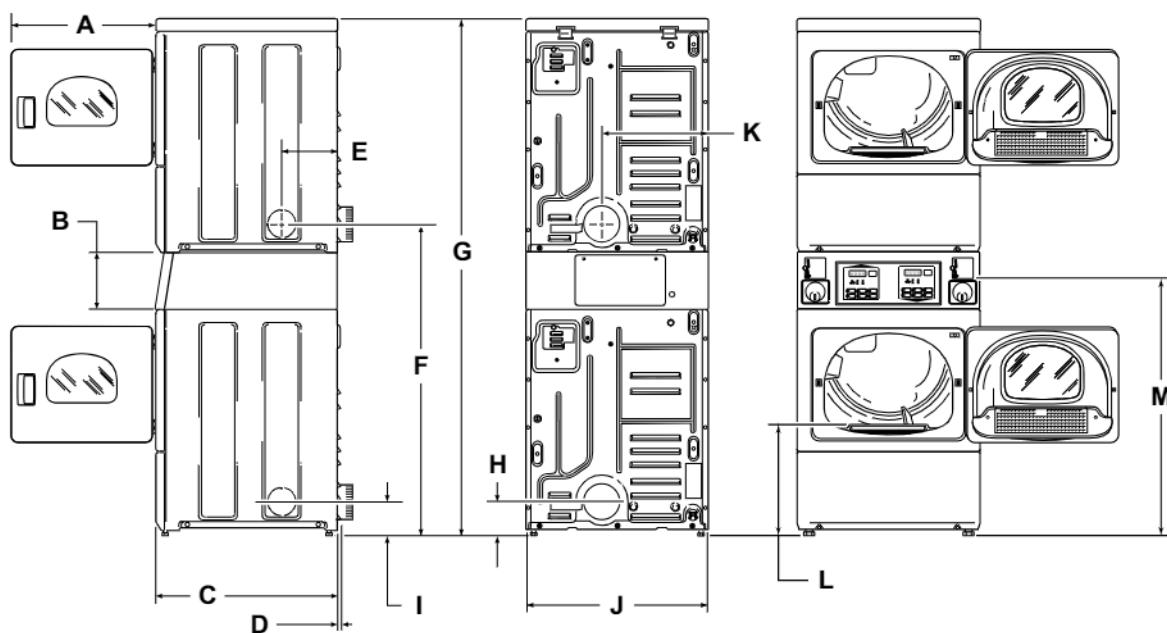

CDS10 Side

CDS10 Back

CDS10 Front

CDS10	A	B	C	D	E	F	G	H	I	J	K	L	M
	597	213	711	11	203	1184	1986	102	114	683	391	392	994