

# MULTI-LOAD DRYERS

ENERGY ADVANTAGE LINE – OPL: MDG35, MDG52, AND MDG78



## MICROPROCESSOR CONTROLS

- Easy-to-read diagnostics help to quickly identify an issue, locate it, and get the machine back into service



## AXIAL AIRFLOW SYSTEM

- Consistent drying with low BTUs
- Helps manage utility costs while still providing effective drying for efficient machine turnover



## OWNER-PROGRAMMABLE SINGLE-PHASE REVERSING CYLINDER

- Helps separate fabrics to promote effective dry cycles helping to reduce tangling and wrinkles



## BUILT TO LAST

- Four Roller Suspension with Permanently Lubricated Bearings – provides consistent drying
- Heavy-Duty Motor – designed to handle large loads with ease
- Extra-Large Door Opening with Dual-Pane Door Glass – provides unhindered access while loading and unloading, and dual-pane glass helps keep heat inside for optimal drying



NON-VENT  
MDG78PNCWW pictured

| MULTI-LOAD DRYERS – ENERGY ADVANTAGE LINE |              |       |
|-------------------------------------------|--------------|-------|
| CAPACITY                                  | MODEL NUMBER | COLOR |
| 35 lb                                     | MDG35PNCWW   | White |
| 50 lb                                     | MDG52PNBWW   | White |
| 75 lb                                     | MDG78PNCWW   | White |



**AMERICA**  
AN AMERICAN COMPANY FOR OVER 100 YEARS

See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.

®/™ © 2020 Maytag. All rights reserved.  
MY200032 11/20

# MULTI-LOAD DRYERS


## ENERGY ADVANTAGE LINE – OPL: MDG35, MDG52, AND MDG78




### GAS MULTI-LOAD DRYERS 120V/60 HZ/1 PHASE

#### MDG78


FRONT VIEW

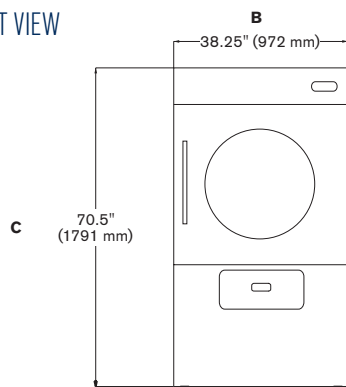

SIDE VIEW

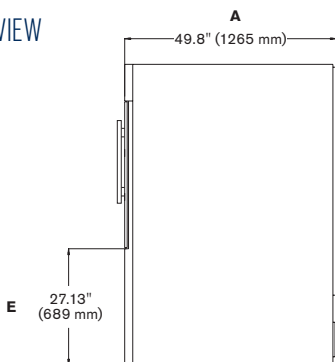

REAR VIEW

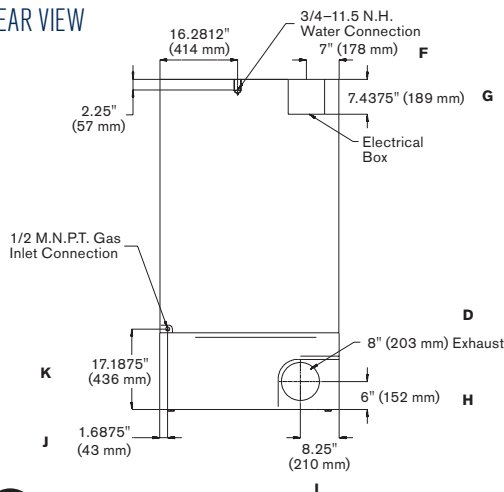

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

| MODEL                                            | MDG35 (PN)          | MDG52 (PN)          | MDG78 (PN)          |
|--------------------------------------------------|---------------------|---------------------|---------------------|
| <b>CAPACITY</b>                                  |                     |                     |                     |
| Number of Dryer Pockets                          | 1                   | 1                   | 1                   |
| Cylinder Volume Each Pocket — cu. ft. (liters)   | 12.27 (347.45)      | 16.02 (453)         | 22.09 (625)         |
| Cylinder Diameter Each Pocket — in. (mm)         | 30 (762)            | 37 (940)            | 37 (940)            |
| Cylinder Depth Each Pocket — in. (mm)            | 30 (762)            | 25.75 (654)         | 35.50 (902)         |
| Dry Load Capacity Each Pocket — lb (kg)          | 35 (15.88)          | 50 (22.68)          | 75 (34)             |
| <b>GAS SPECS/AIRFLOW</b>                         |                     |                     |                     |
| Drive Motor Size — hp (kW)                       | 1/4 (.19)           | 3/4 (.56)           | 3/4 (.56)           |
| Blower Motor Size — hp (kW)                      | 1/2 (.37)           | 1/2 (.37)           | 1/2 (.37)           |
| Airflow Type                                     | AXIAL               | AXIAL               | AXIAL               |
| Airflow — cfm (cmm)                              | 318 (90.3)          | 600 (17)            | 600 (17)            |
| Gas Inlet Size — in. (mm)                        | .5 (12.70) M.N.P.T. | .5 (12.70) M.N.P.T. | .5 (12.70) M.N.P.T. |
| Heat Input, Gas — btu/hr (kcal/hr)               | 64,000 (16,128)     | 110,000 (27,720)    | 130,000 (32,760)    |
| Number of Exhausts                               | 1                   | 1                   | 1                   |
| (D) Exhaust Duct Diameter — in. (mm)             | 6 (152)             | 8 (203.2)           | 8 (203.2)           |
| <b>ELECTRICAL REQUIREMENTS</b>                   |                     |                     |                     |
| Breaker/Fuse — amps                              | 15                  | 20                  | 20                  |
| <b>DIMENSIONS</b>                                |                     |                     |                     |
| (A) Depth — in. (mm)                             | 40.43 (1,027)       | 40.13 (1,019)       | 49.8 (1,265)        |
| (B) Width — in. (mm)                             | 31.12 (790)         | 38.25 (971)         | 38.25 (972)         |
| (C) Height — in. (mm)                            | 67 (1,702)          | 70.50 (1,791)       | 70.50 (1,791)       |
| Door Opening — in. (mm)                          | 19.38 (492)         | 27.38 (695)         | 27.38 (695)         |
| (E) Height to Bottom of Door — in. (mm)          | 32-11/18 (830)      | 50-1/16 (687)       | 27.13 (689)         |
| (F) Width to Center of Electrical Box — in. (mm) | 5-15/32 (139)       | 7 (178)             | 7 (178)             |
| (G) Height of Electrical Box — in. (mm)          | 7-5/8 (194)         | 7-7/16 (189)        | 7-7/16 (189)        |
| (H) Height to Center of Exhaust — in. (mm)       | 20-13/32 (518)      | 6 (152)             | 6 (152)             |
| (I) Width to Center of Exhaust — in. (mm)        | 11-19/32 (279)      | 8-1/4 (210)         | 8-1/4 (210)         |
| (J) Width to Center of Gas Inlet — in. (mm)      | 4-3/8 (111)         | 1-11/16 (43)        | 1-11/16 (43)        |
| (K) Height to Center of Gas Inlet — in. (mm)     | 25-13/18 (653)      | 17-3/16 (436)       | 17-3/16 (436)       |
| <b>APPROXIMATE WEIGHT</b>                        |                     |                     |                     |
| Uncrated — lb (kg)                               | 462 (209)           | 610 (277)           | 745 (338)           |
| Crated — lb (kg)                                 | 492 (223)           | 640 (290)           | 775 (352)           |
| <b>CONTROL/USER INTERFACE</b>                    |                     |                     |                     |
| Control Type                                     | Microprocessor      | Microprocessor      | Microprocessor      |
| Display Type                                     | Digital             | Digital             | Digital             |
| Vended Controller                                | No                  | No                  | No                  |
| OPL Controller                                   | Microprocessor      | Microprocessor      | Microprocessor      |
| <b>CONSTRUCTION</b>                              |                     |                     |                     |
| Cylinder                                         | Galvanized Steel    | Galvanized Steel    | Galvanized Steel    |
| Top                                              | Painted CRS         | Painted CRS         | Painted CRS         |
| Front                                            | White               | White               | White               |
| Side                                             | Painted CRS         | Painted CRS         | Painted CRS         |