

# MULTI-LOAD DRYERS

TRADITIONAL LINE – OPL: 120 LB AND 170 LB



## MICROPROCESSOR CONTROLS

- Gives end users the option to select the ideal cycle for individual wash and dry needs
- Easy-to-read diagnostics help to quickly identify an issue, locate it, and get the machine back into service



## RADIAL AIRFLOW SYSTEM

- Provides fast moisture removal to help dry large loads and bulky items
- High BTU burners and airflow burners



## OWNER-PROGRAMMABLE THREE-PHASE REVERSING CYLINDER

- Helps separate fabrics to promote effective dry cycles, helping to reduce tangling and wrinkles



## BUILT TO LAST

- Heavy-Duty Motor – handles large loads with ease
- Sealed Bearings – never need lubrication
- Large-Capacity Lint Compartment - helps dry clothes evenly by allowing more airflow to pass through



NON VEND  
MDG170PJWW pictured



NON VEND  
MDG120PJWW pictured

MULTI-LOAD DRYERS – TRADITIONAL LINE		
CAPACITY	MODEL NUMBER	COLOR
120 lb	MDG120PJWW	White
170 lb	MDG170PJWW	White



**AMERICA**  
AN AMERICAN COMPANY FOR OVER 100 YEARS

See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.


VISIT [MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM) FOR MORE INFORMATION.

# MULTI-LOAD DRYERS

## TRADITIONAL LINE – OPL: 120 LB AND 170 LB



### GAS MULTI-LOAD DRYERS 208V-240V / 60 HZ / 3 PHASE

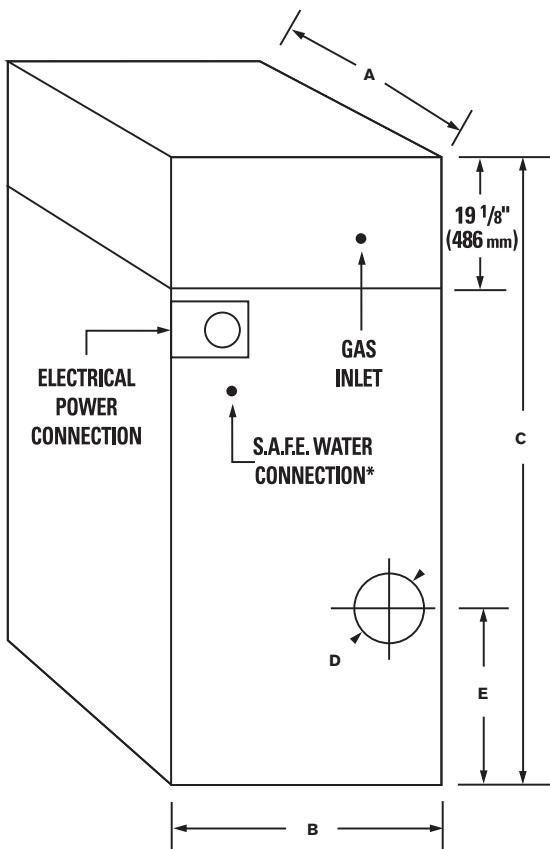

\*S.A.F.E. water pressure requires 40 psi  $\pm$  20 psi. Requires 1/2" (12.7 mm) water hose connection.

MODEL	MDG120 (PJ)	MDG170 (PJ)
<b>CAPACITY</b>		
Number of Dryer Pockets	1	1
Cylinder Volume Each Pocket — cu. ft. (liters)	38.18 (1,081)	51.20 (1,450)
Cylinder Diameter Each Pocket — in. (mm)	44.62 (1,083)	51.50 (1,308)
Cylinder Depth Each Pocket — in. (mm)	42.12 (1,070)	42.5 (1,080)
Dry Load Capacity Each Pocket — lb (kg)	120 (54)	170 (77)
<b>GAS SPECS/AIRFLOW</b>		
Drive Motor Size — hp (kW)	3/4 (.56)	1 (.75)
Blower Motor Size — hp (kW)	3 (2.24)	7.5 (5.60)
Airflow Type	Radial	Radial
Airflow — cfm (cmm)	2,150 (60.88)	3,700 (104.77)
Gas Inlet Size — in. (mm)	1 (25.4) F.N.P.T.	1.5 (38.10) F.N.P.T.
Heat Input, Gas — btu/hr (kcal/hr)	375,000 (94,500)	550,000 (138,598)
Number of Exhausts	1	1
(D) Exhaust Duct Diameter — in. (mm)	14 (356)	18 (457)
<b>ELECTRICAL REQUIREMENTS</b>		
Break Fuse - Amps	20	40
<b>DIMENSIONS</b>		
(A) Depth — in. (mm)	62.50 (1,588)	62.50 (1,588)
(B) Width — in. (mm)	48.75 (1,238)	55.88 (1,419)
(C) Height — in. (mm)	86.88 (2,207)	100 (2,540)
Door Opening — in. (mm)	31.38 (797)	31.38 (797)
(E) Height to Center of Exhaust — in. (mm)	9.5 (241)	19.25 (489)
<b>APPROXIMATE WEIGHT</b>		
Uncrated — lb (kg)	1,349 (612)	2,103 (954)
Crated — lb (kg)	1,489 (675)	2,269 (1,029)
<b>CONTROL/USER INTERFACE</b>		
Control Type	Microprocessor	Microprocessor
Display Type	Digital	Digital
Vended Controller	No	No
OPL Controller	Microprocessor	Microprocessor
<b>CONSTRUCTION</b>		
Cylinder	Galvanized Steel	Galvanized Steel
Top	Painted CRS	Painted CRS
Front	White	White
Sides	Painted CRS	Painted CRS



Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.