



# GEAR GUARDIAN™ DRYING CABINET

FOR THOROUGH MOISTURE REMOVAL OF PROCESSED FIREFIGHTER GEAR



FC-3

*Dries up to six sets of gear at one time • Directed and controlled airflow • Durable stainless steel construction*


QUICKLY DRY AND CONDITION GEAR • LOW TEMPERATURES • NO MECHANICAL ACTION  
**GEAR GUARDIAN™ DRYING CABINET**

*Created Specifically for Firefighter Gear*

The Gear Guardian drying cabinet has been engineered specifically to safely and efficiently dry valuable firefighter gear.

*Higher Capacity*

The large capacity of the FC-6 allows for six hanging racks for jackets and bibs, as well as six boot and glove racks all to be dried simultaneously. The FC-3 allows for three hanging racks and 3 boot and glove racks. And the high 1200 cfm of airflow within the cabinet will process the goods faster. Flat goods can also be dried on the optional adjustable shelf rack.

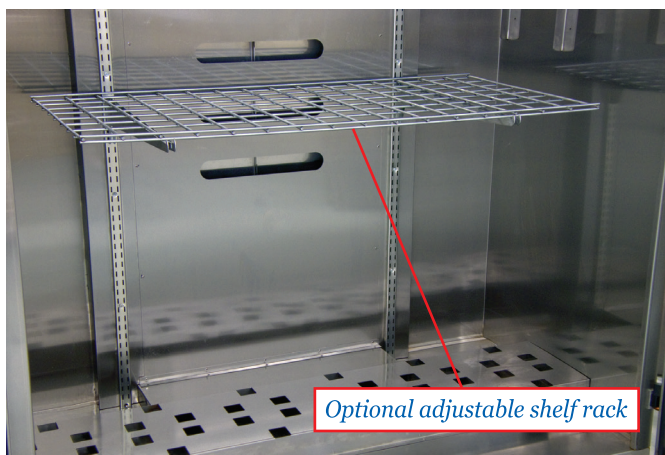

Optional adjustable shelf rack

*Quality and Durability*

Stainless steel construction provides the highest level of corrosion resistance in the industry. Triple point locking mechanism on door creates a strong and efficient seal. Plus, heavy construction ensures a long life of everyday use.

*Simplified Maintenance*

Features off-the-shelf controls, electric heating elements (8 or 12kW) and blowers that are available locally to *simplify* maintenance and save you money.

*Directed and Controlled Airflow*

Insertion air tubes allow heated airflow to penetrate into the hanging jackets and bibs, providing superior drying performance. An optional boot rack can be inserted as tubes into the bib leg to increase directed airflow into the gear and speed drying time.



Optional boot rack

*Temperature Compliance*

Heating elements are coupled with a temperature probe and a high-limit safety switch to ensure internal temperatures will not rise above 105°F as specified in NFPA 1851 code.

*Value*

Using directed airflow instead of mechanical action, this efficient drying cabinet is a great addition to any firehouse. With capacity for three or six complete sets of turnout gear and an approximate 60 minute cycle, this dryer will save you valuable time.

SPECIFICATIONS	FC-3	FC-6
Maximum capacity - complete sets	3	6
Overall width* in. (mm)	40 (1016)	61 (1549)
Overall depth in. (mm)	34.75 (883)	36 (914)
Overall height** in. (mm)	86 (2184)	86 (2184)
Approximate net weight lb. (kg)	565 (256)	775 (352)
Clearance from floor to bottom of door in. (mm)	1.5 (38)	1.5 (38)
Vent with manual damper control in. (mm)	6 (152)	6 (152)
<i>Available Voltages</i>		
208 V-50/60 Hz-1 Ph	45 FLA	60 FLA
208 V-50/60 Hz-3 Ph	25 FLA	36 FLA
240 V-50/60 Hz-1 Ph	40 FLA	55 FLA
230 V-50/60 Hz-3 Ph	23 FLA	33 FLA

\*Add 14.75 in (375) for control door swing \*\*Overall height with top removed is 76.5 in. (1943 mm).  
 Specifications subject to change without notice.



Pellerin Milnor Corporation  
 P.O. Box 400, Kenner, LA 70063 USA  
 Phone: (504) 712-7656  
 Toll Free: (800) 469-8780  
 www.milnor.com  
 milnorinfo@milnor.com  
 Printed in U.S.A.  
 © Pellerin Milnor Corporation  
 Brochure B22SL08001/18015