

# OPL WHITE LABEL

NAT030GN0MZAMPD0AA, NAT040GN0MZAMPD0AA, NAT055GN0MZAMPD0AA


## 6 Cycle Control Cabinet Hardmount Washer-Extractor

### FEATURES

- 200 G-Force
- Stainless steel cylinder and tub
- Anthracite gray front and side panels
- Liquid soap connection, 4 signal soap board & top load soap box
- Large drain valve
- Front access to vital parts for easy maintenance
- 3 water inlets

### LIMITED WARRANTY

- 1-Year: door seal gaskets, water valve diaphragms, belts and internal hoses
- 5-Years: frame, cylinder shaft and bearings
- 3-Years: any parts not listed above

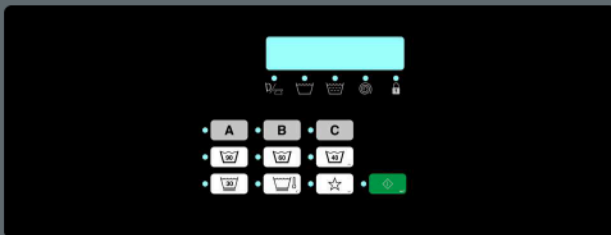

# OPL WHITE LABEL - CABINET HARDMOUNT WASHER-EXTRACTOR SPECIFICATIONS

| MODEL                                  |                  | NAT030GN0MZAMPD0AA* | NAT040GN0MZAMPD0AA* | NAT055GN0MZAMPD0AA* |
|--|------------------|---------------------|---------------------|---------------------|
| CAPACITY - lb (kg)                     |                  | 30 (13.5)           | 40 (18)             | 55 (24)             |
| OVERALL WIDTH - in (mm)                |                  | 29.53 (750)         | 35.03 (890)         | 35.03 (890)         |
| OVERALL DEPTH - in (mm)                |                  | 35.43 (900)         | 36.02 (915)         | 41.73 (1,060)       |
| OVERALL HEIGHT - in (mm)               |                  | 48.22 (1,225)       | 55.51 (1,410)       | 55.51 (1,410)       |
| CYLINDER DIAMETER - in (mm)            |                  | 24.40 (620)         | 29.53 (750)         | 29.53 (750)         |
| CYLINDER DEPTH - in (mm)               |                  | 17.72 (450)         | 16.14 (410)         | 21.46 (545)         |
| CYLINDER VOLUME - in (mm)              |                  | 4.8 (135)           | 6.4 (180)           | 8.5 (240)           |
| DOOR OPENING SIZE - in (mm)            |                  | 16.14 (410)         | 18.11 (460)         | 18.11 (460)         |
| DOOR BOTTOM TO FLOOR - in (mm)         |                  | 13.46 (342)         | 18.31 (465)         | 18.31 (465)         |
| WATER INLET CONNECTION - in (mm)       |                  | 3 x 0.75 (19)       | 3 x 0.75 (19)       | 3 x 0.75 (19)       |
| DRAIN DIAMETER - in (mm)               |                  | 1 x 3 (76)          | 1 x 3 (76)          | 1 x 3 (76)          |
| DRAIN CENTER HEIGHT TO FLOOR - in (mm) |                  | 3.85 (98)           | 5.12 (130)          | 5.12 (130)          |
| MOTOR POWER - HP (kW)                  |                  | 1 (0.75)            | 1.48 (1.1)          | 2.01 (1.5)          |
| CYLINDER SPEED                         | Wash - RPM       | 46                  | 42                  | 42                  |
|  | RPM (G-Force)    | 760 (200)           | 690 (200)           | 690 (200)           |
| VOLTAGE/ CIRCUIT BREAKER - FLA         | (Z) 208-240/60/1 | 10 - 7.2            | 15 - 9.1            | 15 - 9.2            |
| SHIPPING DIMENSIONS APPROX. - in (mm)  | Width            | 31.50 (800)         | 36.42 (925)         | 36.42 (925)         |
|  | Depth            | 37.4 (950)          | 38.19 (970)         | 44.49 (1,130)       |
|  | Height           | 53.35 (1,355)       | 61.02 (1,550)       | 61.02 (1,550)       |
| NET WEIGHT - lb (kg)                   |                  | 419 (190)           | 695 (315)           | 728 (330)           |
| STANDARD SHIPPING WEIGHT - lb (kg)     |                  | 441 (200)           | 739 (335)           | 783 (355)           |
| AGENCY APPROVALS                       |                  | UL                  | UL                  | UL                  |

**\* 7.9" base available**

For the most accurate information, the installation guide should be used for all installations, design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.