

ADC AD-202

200-lb Capacity OPL Dryer

Standard Features:

- 200-lb. capacity
- 61.20 cu. ft. volume
- 590,000 Btu/hr heat input and 4,200 cfm
- Radial airflow
- Easy-to-load vertical steel doors
- Self-diagnostic microprocessor with patented auto drying feature
- Easy access to lint compartment
- Available in gas and steam heat
- Reversing basket
- Four-point roller support and drive system
- Stainless steel basket with removable panels

Optional Features:

- Stainless steel front and cabinet
- F.S.S. (Fire Suppression System)



AD-202 OPL Dryer

*Not available in United States and Canada

Why Purchase the AD-202?

Engineer-Driven Design That is Built to Last

Our dryers showcase an engineer-driven approach to design. Bearings are permanently lubricated on the motor and drive system. We use V-belts and pulleys for smooth, quiet, and trouble-free operation. Our dryer cabinets are electrostatically powder-painted inside and out, then baked at 420-degrees fahrenheit before final assembly—ensuring the hardest surface and the longest-lasting finish in the industry.

Rugged Steel Vertical Doors with Heavy-Duty Pulley System

Our heavy-duty steel door design provides ease-of-use for loading and unloading, utilizing a counter-balanced pulley system to ensure simple open and close operation. A gasketless door glass panel provides security and durability versus rubber-type gaskets.

Easy-to-Read, Multilingual Controls

ADC continues to apply innovative technology to dryer operation. Our state-of-the-art microprocessor with auto-dry capabilities, easy-to-read LED screens and our user-friendly multilingual interface positions ADC as a leader in the laundry industry.

Your local ADC independent authorized distributor







ADC AD-202

AD-202 Specifications

Tumbler Capacity (dry weight)		200 lbs. (90.72 kg)
Tumbler Diameter		55-5/8" (141.29 cm)
Tumbler Depth		43-1/2" (110.49 cm)
Tumbler Volume		61.20 cu ft (1732.99 L)
Tumbler/Drive Motor		3 hp (2.24 kW)
Blower/Fan Motor		7-1/2 hp (5.59 kW)
Door Opening (Diameter)		40-3/4" (103.50 cm)
Door Sill Height		34-5/8" (87.95 cm)
Water Connection		3/4" - 11.5 NH
Dryers per 20'/40' Container		3 / 7
Dryers per 48'/53' Truck		8 / 8
Width		60-3/8"
Depth		54"
Height		106"
GAS	Voltage Available	208-575v 3ø 3,4w 50/60 Hz
	Approx. Net Weight	2,100 lb (952.54 kg)
	Approx. Shipping Weight	2,166 lb (982.48 kg)
	Airflow 50/60 Hz	4,200 cfm (118.9 cmm)
	Heat Input	590,000 Btu/hr (148,678 kcal/hr)
	Exhaust Connection (Diameter)	20" (50.80 cm)
	Compressed Air Connection	1/4" Quick Connection
	Compressed Air Volume	4.25 cfh (0.12 cmh)
	Inlet Pipe Connection	1-1/2" F.N.P.T.
ELECTRIC	Voltage Available	N/A
	Approx. Net Weight	
	Approx. Shipping Weight	
	Airflow	
	Exhaust Connection (Diameter)	
	Compressed Air Connection	
	Compressed Air Volume	
	Oven Size	
	kW Btu/hr kcal/hr	
STEAM	Voltage Available	208-575v 3ø 3,4w 50/60 Hz
	Approx. Net Weight	2,349 lb (1,065.49 kg)
	Approx. Shipping Weight	2,515 lb (1,140.78 kg)
	Airflow 50/60 Hz	4,400 cfm (124.59 cmm)
	Steam Consumption	540 lb/hr (245 kg/hr)
	Operating Steam Pressure	125 psi max (8.62 bar)
	Exhaust Connection (Diameter)	20" (50.80 cm)
	Compressed Air Connection	1/4" Quick Connection
	Compressed Air Volume	4.25 cfh (0.12 cmh)
	Boiler HP (Normal Load)	14.5 Bhp
	Standard Supply Connection*	(1) 1-1/2" N.P.T. (Female)
	Standard Return Connection*	(1) 1-1/2" N.P.T. (Female)

* Refer to installation manual for optional steam connections.

REV 5/30/14

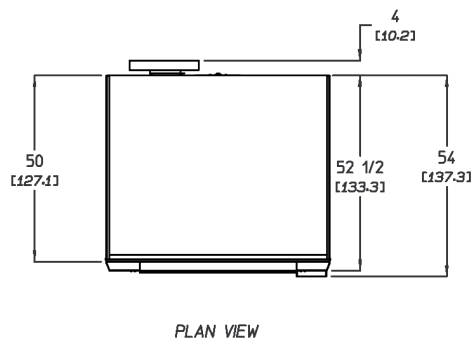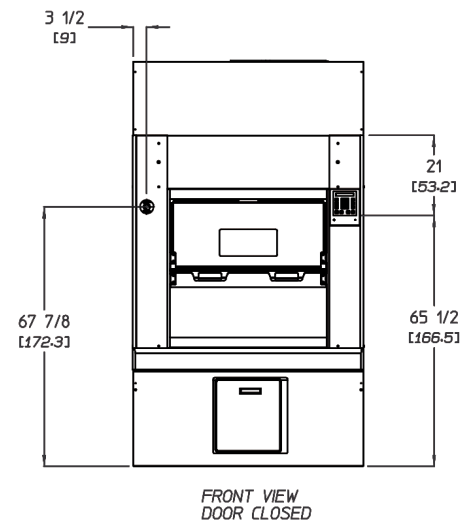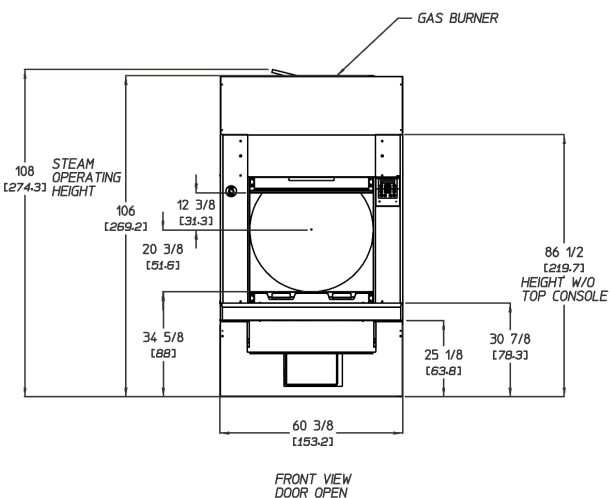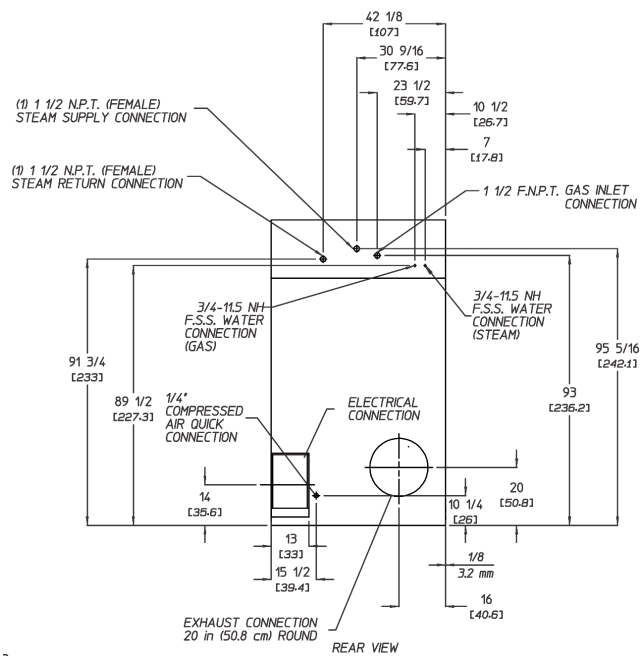

Electrical Service Specifications

SERVICE VOLTAGE	PHASE	WIRE SERVICE	APPROX AMP DRAW		CIRCUIT BREAKER
			60 Hz	50 Hz	
GAS & STEAM					
208	3ø	3	37.0	--	50
220	3ø	3	35.0	--	50
220	3ø	3	--	36.0	50
230	3ø	3	34.0	--	50
230	3ø	3	--	30.0	50
240	3ø	3	35.0	--	50
380	3ø	3	19.0	--	30
380	3ø	4	--	18.0	30
400	3ø	4	--	17.0	30
416	3ø	4	--	17.0	30
460	3ø	3	19.0	--	30
480	3ø	3	19.0	--	30
575	3ø	3	14.0	--	20
ELECTRIC					
220	3ø	3	312.0	--	400.0
240	3ø	3	338.0	--	425.0



QY160008 1/17

88 Currant Road, Fall River, MA 02720-4781 • 508.678.9000

www.adclaundry.com