



FX350 | FX450 | FX600 SOFTMOUNT WASHER-EXTRACTORS



TOUCH CONTROL AVAILABLE
Multilingual user-friendly 7" touch control



CLOUD-BASED PLATFORM
to easily monitor your laundry everywhere and at any time



IMPROVED DURABILITY
for your peace of mind with a 3-year warranty



AUTOMATIC WEIGHING SYSTEMS
Automatically adapts amount of water and detergent based on the wash load




CASCADE DRUM TECHNOLOGY
Extra mechanical action thanks to its cascading shape of the surface

FEATURES & BENEFITS

| Features | Options | Control |
|--|---|---|
| <ul style="list-style-type: none"> Stainless steel drum and tub Patented soap hopper Easy Soap™ - liquid soaps connection Easy access to all vital parts from the front Large door opening for easy loading & unloading 2x large drain valves (Ø 76 mm) Ergonomic height of door and control position for an easy operation Bumper (front side protection) | <ul style="list-style-type: none"> Liquid soap connection and pumps Water recovery kit Steam heating version 3rd water inlet Recycle drain valve and double door glass Execution Insulation for energy and heat & noise reduction Extra signalization (orange light + sound) Air operated water inlets Automatic weighing system through 4 weighing cells Tilting system: assists operators during loading & unloading | <ul style="list-style-type: none"> XControl FLEX PLUS – fully programmable and customizable cycles 7" touch screen. <ul style="list-style-type: none"> User-friendly screen with operating instructions built in as part of the control Complete control content available in 34 languages XControl – fully programmable control with 20 Pre-set programs and memory up to 99. |

SPECIFICATIONS

| TYPE | | FX350 | FX450 | FX600 |
|------------------------------|------------|----------------|----------------|----------------|
| INNERDRUM | | | | |
| Capacity 1:9 | kg (lb) | 39 (86) | 50 (110) | 67 (148) |
| Capacity 1:10 | kg (lb) | 35 (77) | 45 (99) | 60 (132) |
| Volume | litres | 351 | 452 | 601 |
| Diameter | mm | 914 | 914 | 1035 |
| DRUM SPEED | | | | |
| Wash | rpm | 38 | 38 | 36 |
| Extraction | rpm | 839 | 839 | 788 |
| G-FACTOR | | 360 | 360 | 360 |
| HEATING | | | | |
| Electricity | kW | 24 | 36 | 54 |
| Steam | bar | 3.8 | 3.8 | 3.8 |
| Sound pressure level | dB (A) | <75 | <75 | <75 |
| Water valves connection | BSP | 1" | 1" | 1" |
| Water pressure | kPa | 100-800 | 100-800 | 100-800 |
| Rec. water pressure | kPa | 300-500 | 300-500 | 300-500 |
| Water inlet | l/min | 518 | 518 | 518 |
| Drain valve | outer Ø mm | 2x76 | 2x76 | 2x76 |
| Flow amount with drain valve | l/min | 2x 210 | 2x 210 | 2x 210 |
| Steam valve connection | BSP | 3/4" | 3/4" | 3/4" |
| Steam pressure | kPa | 300-800 | 300-800 | 300-800 |
| DIMENSIONS | | | | |
| Size H×W×D | mm | 1925x1315x1270 | 1925x1315x1502 | 1925x1315x1502 |
| Net weight | kg | 1010 | 1350 | 1500 |
| TRANSPORT DATA | | | | |
| Packed H×W×D | mm | 2125x1425x1470 | 2125x1425x1700 | 2125x1425x1700 |
| Gross weight | kg | 1170 | 1490 | 1640 |

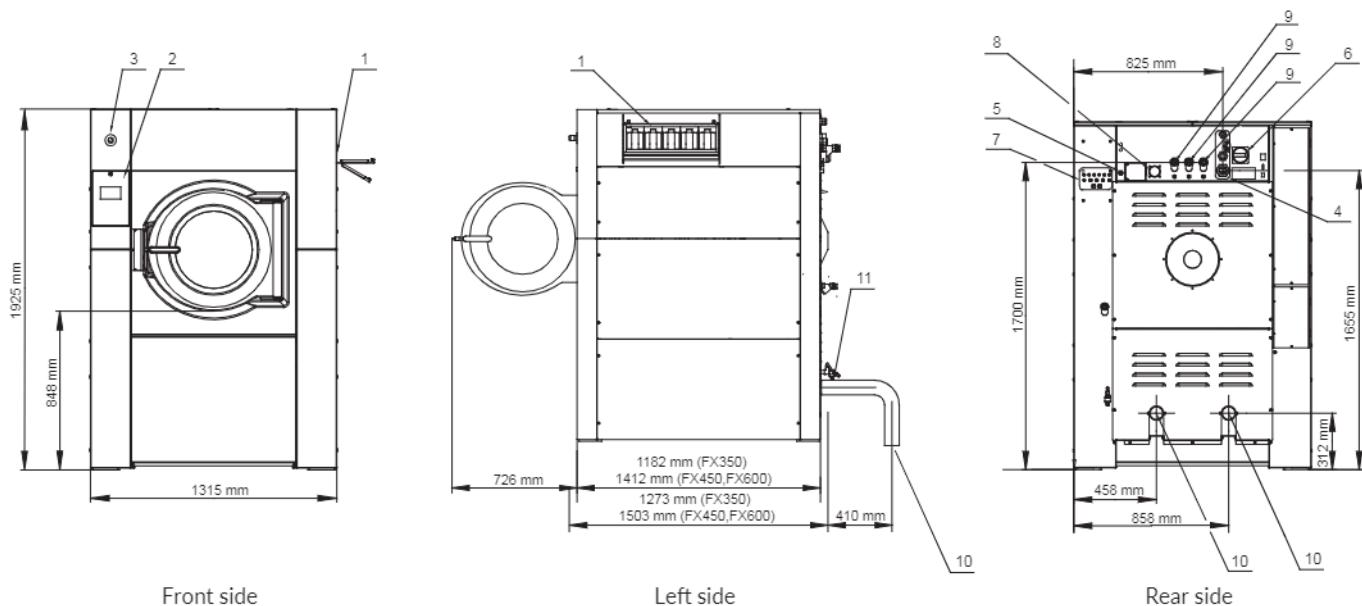

1. Soap hopper
2. Keyboard
3. Emergency stop
4. Electrical connection

5. Electrical connection to liquid soap
6. Main switch
7. Liquid soap pump connections
8. Air vent tub

9. Water connection
10. Drain valve
11. Water Sample Tap