



DX13 | DX16 | DX24 | DX34
TUMBLE DRYER



SAFETECH FIRE SUPPRESSION SYSTEM
For maximal safety of your operations



SENSO DRY+ TECHNOLOGY
Lower energy and utility costs, lower linen replacement costs



CLOUD - BASED PLATFORM
to easily monitor your laundry everywhere and at any time



RADIAL AND AXIAL AIRFLOW
For maximal heat transfer, low energy consumption and short drying time



EXTRA LARGE DOOR OPENING
For easy loading and unloading



IMPROVED DURABILITY
for your peace of mind with a 3 - year warranty

FEATURES & BENEFITS

Features

- Standard galvanized drum
- Stainless steel front panel with black painted door
- Large door opening for easy loading & unloading
- Self cleaning lint screen
- AutoDry capability for OPL

Options

- Coin operated
- Stainless steel drum
- Reversing drum

Control

- XControl FLEX PLUS - fully programmable and customizable cycles 7" touch screen.
 - User - friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
- Easy - To - Use Microprocessor - Dual Digital Control or OPL Micro
- Coin Operated Easy - To - Use Microprocessor - XQ - Control (ECT)


SPECIFICATIONS

| TYPE | | DX13 | DX16 | DX24 | DX34 |
|------------------------------|---------|---------------|---------------|---------------|----------------|
| CAPACITY | | | | | |
| Capacity 1:18 | kg (lb) | 15(33) | 19(43) | 27(59) | 35(77) |
| Capacity 1:22 | kg (lb) | 13(30) | 16(35) | 24(55) | 29(64) |
| Drum volume | l | 270 | 350 | 490 | 634 |
| Drum diameter | mm | Ø 673 | Ø 762 | Ø 838 | Ø 940 |
| AIRFLOW | | | | | |
| | l/sec | 240 | 260 - 280 | 330 | 380 |
| MOTORS | | | | | |
| Fan | kW | 0,40 | 0,40 | 0,40 | 0,40 |
| Drive | kW | 0,40 | 0,40 | 0,40 | 0,40 |
| NOISE LEVEL | dba | 59 | 61 | 61 | 60 |
| GAS HEATING | | | | | |
| Gas connection | NPT | 1/2" | 1/2" | 1/2" | 1/2" |
| Electrical connection | | | | | |
| Energy | kW | 16.1 - 21.4 | 18.8 - 26.4 | 30.8 - 32.8 | 35.8 - 48.4 |
| | kBTU/h | 55 - 73 | 64 - 90 | 105 - 112 | 150 |
| STEAM HEATING | | | | | |
| Steam connection | NPT | - | - | 3/4" | 3/4" |
| Electrical connection | | | | | |
| Steam pressure | bar | - | - | 5.5 - 8.6 | 5.3 - 6.9 |
| ELECTRICAL HEATING | | | | | |
| Electrical connection | | | | | |
| Energy | kW | 12 - 21 | 9 - 24 | 18 - 27 | 21 - 36 |
| EXHAUST | | | | | |
| | mm | 150 | 150 - 200 | 200 | 200 - 250 |
| DIMENSIONS | | | | | |
| H×W×D | mm | 1625x710x1155 | 1625x800x1155 | 1700x870x1350 | 1960x980x1190 |
| Net weight | kg | 150 - 155 | 165 - 170 | 195 - 210 | 325 - 335 |
| TRANSPORT DATA | | | | | |
| Packed H×W×D | mm | 1720x760x1240 | 1720x840x1240 | 1790x900x1450 | 2120x1050x1420 |
| Gross weight | kg | 165 - 170 | 185 | 210 - 215 | 345 - 360 |

DIMENSIONS

| | A | B | C | D | E | F | G* | H* | I* | J | K |
|------|--------------|-----|-----|-----|------|-------|-----|-----|----|-----|-----|
| DX13 | 670 | 700 | 720 | 810 | 1155 | 1625 | 370 | 405 | 40 | 625 | 710 |
| DX16 | 710 | 700 | 720 | 810 | 1155 | 1625 | 370 | 435 | 40 | 695 | 800 |
| DX24 | 810 | 670 | 850 | 935 | 1350 | 1700 | 395 | 510 | 40 | 775 | 875 |
| | depth height | | | | | width | | | | | |

*Fire suppression system optional - may not be on machine.

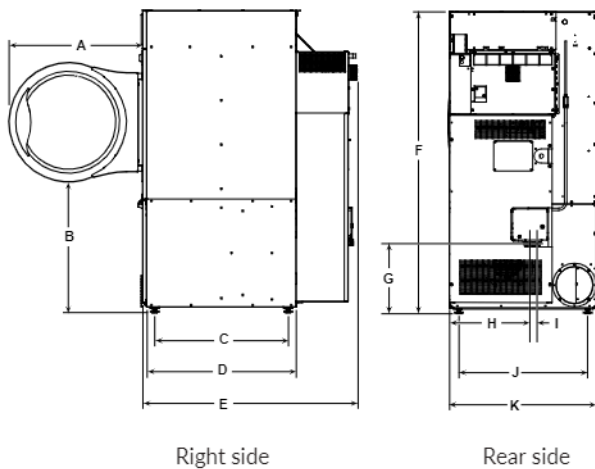

DIMENSIONS

| | A | B | C | D | E* | F | G | H* | I* | J* | K | L |
|------|--------------|-----|------|------|-----|-------|-----|-----|-----|-----|-----|------|
| DX34 | 740 | 860 | 1190 | 1960 | 465 | 980 | 840 | 190 | 150 | 350 | 900 | 1000 |
| | depth height | | | | | width | | | | | | |

*Fire suppression system optional - may not be on machine.

