FT-LITE DRYWORK FOLDER FOR ON-PREMISE LAUNDRIES



CONTINENTAL

Maximum Item Dimension

Width inch (mm) 47 (1200) Length inch (mm) 94.5 (2400)

Net Weight

2094 (950)

Machine Width inch (mm)

Ch (mm) 62.6 (1590)

Machine Depth

Machine Height

inch (mm)

Air Pressure

PSI (bar)

Electrical Power

Circuit Protection Amp

FT-LITE

208-240/60/3 20

An economic, compact and productive folder, the FT-LITE quickly and accurately folds and stacks a variety of flatwork goods. With superb flexibility and multiple folding options, the FT-LITE can be configured to meet the demands of any on-premise laundry.

An economic, compact and productive folder, the FT-LITE properly folds up to 1,000 items per hour. The FT-LITE quickly and accurately folds small-and large-scale items (maximum dimension of 47 x 94.5 inches), including washcloths, hand towels, bath towels and airline blankets. Operators manually feed items onto a feeding table for rapid and accurate folding and stacking.

FOLDING & STACKING FLEXIBILITY TO MEET SPECIFIC NEEDS

The FT-LITE offers superb flexibility and is programmable to create primary and secondary folds. It automatically stacks items according to established program settings.

PROGRAMMABILITY

The control offers an easy-to-use touch-screen display that delivers total control over the folding and stacking of multiple items. Each of the programmed items can be folded according to a variety of specifications, including primary- and secondary-fold options.

SAFE & ERGONOMIC


Designed for ease of use and productivity, the FT-LITE includes a discharge converyor that returns folded goods to the operator position. For safety, the FT-LITE features an emergency stop button and complies with all safety regulations and directives.

COMMITTED TO QUALITY AND THE ENVIRONMENT

FT-LITE folders are produced in an ISO9001 and ISO14001 certified manufacturing facility. Therefore, you are assured of the highest environmental and safety standards. Built for longevity, the FT-LITE is backed by a two-year limited manufacturer's warranty!

PRIMARY AND SECONDARY (CROSS) FOLDS

Up to three primary (longitudinal) folds and one secondary (cross) fold are produced through combined use of blowing, inversion and blade systems. Secondary (cross) folds can be configured as half folds (1/2 fold) or French-like folds (1/3 fold). The FT-LITE performs secondary (cross) folds with a rotary stacker and items are returned from the stacker to the operator on an automated discharge belt.

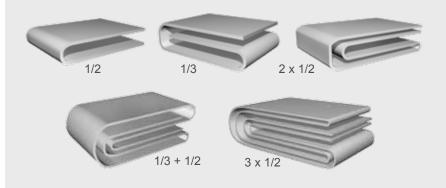













* Product specifications are subject to change without notice



800-256-1073 www.continentalgirbau.com

2500 State Road 44 • Oshkosh, WI 54904 920-231-8222 • Fax 920-231-4666