

Vended Stack Dryer

At Huebsch®, our priority is making commercial laundry equipment that's perfectly aligned with your business philosophy. In other words, because you believe that profit is the inevitable result of superior efficiency, durability, simplicity and service, that's exactly what we deliver.

FAST DRYING TIMES

Huebsch dryers offer a 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and product fast drying times, while lowering utility consumption.

SOLID BASE

Huebsch dryers are built on sturdy steel bases to ensure years of worry-free performance.


SPACE SAVINGS

A stack dryer gives your vended laundry all the benefits of two stand-alone dryers in a space of one machine. The stack utilizes all the same connections as a standard dryer, so there are no special hookups required.

UNMATCHED DURABILITY

Built with premium materials and tested to meet the demands of the harshest environments, these commercial-grade machines deliver reliable, efficient operation load after load—and they're backed up by Huebsch's standard three-year warranty.*

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.

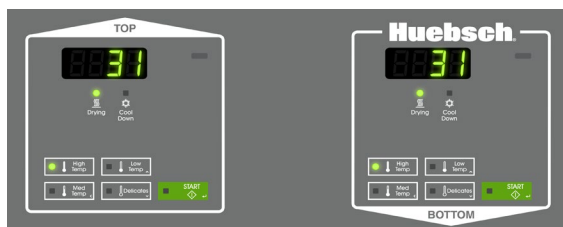

MICRO-DISPLAY CONTROL II

The Micro-Display Control II features a time-remaining countdown, coin countdown and cycle status lights.

Vended **Stack Dryer** specifications

Specifications			
Control Options		MDC II	Coin Slide
Models	Electric	HSEBCAGW173TW01 HSEBYAGW173TW01	HSEXAGW173TW01
	Gas	HSGBCAGW113TW01 HSGBYAGW113TW01	HSGSXAGW113TW01
Capacity - lb (kg)		18 (8.2)	
Cylinder Volume - cu. ft. (liters)		7.0 (198)	
Width - in (mm)		26.875 (683)	
Depth - in (mm)		28 (711)	
Height - in (mm)		78.19 (1986)	
Motor Size - HP (kw)		0.33 (0.25)	
Available Heat Sources		Electric or Gas	
Available Heating Element (Electric W)		4750 @ 208V 5350 @ 240V	
Gas Inlet Connection - in (mm)		3/8 (9.5)	
Gas Consumption - BTU/Hr		25,000	
Exhaust Outlet Diameter - in (mm)		4 (102)	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Available Cycles*		High, Medium, Low, Delicates	
Cycle Indicator Lights		Yes	
Cylinder Finish		Galvanized	
Available Colors		White	
Door Type (Solid/Window)		Solid or Window	
US Electrical Requirements - (Voltage/Hz/Ph)		Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp	
Canada Electrical Requirements - Single Supply Cord (Voltage/Hz/Ph)		Electric: 120/240/60/1 - 60 Amp Electric: 120/208/60/1 - 60 Amp Gas: 120/60/1 - 20 Amp	
Shipping Dimensions - in (mm)	Width	29 (737)	
	Depth	32 3/4 (832)	
	Height	80 (2032)	
Net Weight - lb (kg)		Elec/Gas 265/275 (120/125)	
Shipping Weight - lb (kg)		Elec/Gas 280/290 (127/132)	
Available Agency Approvals		Elec: C ^{UL} US, Gas: C ^{CSA} US	

* Information shown applies to highest end control available.

Note: Not all options are available for all models.
Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.

Refer to the price list for the available models and options.

Lower unit is ADA Compliant.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

©Copyright 2019 Alliance Laundry Systems LLC