

TUMBLE DRYERS

DX
RANGE

DX 25

DX 34

25KG
55LB

34KG
75LB



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+® (only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY OPERATION




LARGE DOOR OPENING

senso.dry+

SafeTech™

TYPE		DX25	DX34
CAPACITY			
Capacity	kg	25	34
Drum volume	l	530	634
Drum diameter	mm	Ø 940	Ø 940
AIRFLOW			
Airflow	l/s	330	380 (G 330)
DRYING AVERAGE			
Gas heating	g/min	476	571
Electric heating	g/min	390	521
MOTOR			
Fan	kW	0,4	0,4
Drive	kW	0,4	0,4
GAS HEATING			
Energy	kW	38,1	48,4
Energy	kBTU/h	130	165
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Gas connection	NPT	½"	½"
STEAM HEATING			
High pressure 6,9 bar	kW kBTU/h	33,29 113,6	39,24 133,9
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Steam connection	NPT	¾"	¾"
ELECTRICAL HEATING			
Energy	kW	30	36
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz	
EXHAUST	Ø /mm	200	200
DIMENSIONS			
Size H×W×D	mm	1960×980×1190	1960×980×1350
Net weight (E, G, S)	kg	310, 295, 315	320, 310, 325
TRANSPORT DATA			
Packed (foil E, G) H×W×D	mm	2060×1050×1270	2060×1050×1420
Packed (foil S) H×W×D	mm	2120×1050×1270	2120×1050×1420
Gross weight (foil,E,G,S)	kg	330, 320, 335	340, 330, 350
Packed (crate) H×W×D	mm	2240×1170×1350	2240×1170×1500
Gross weight (crate,E,G,S)	kg	395, 380, 400	410, 395, 415

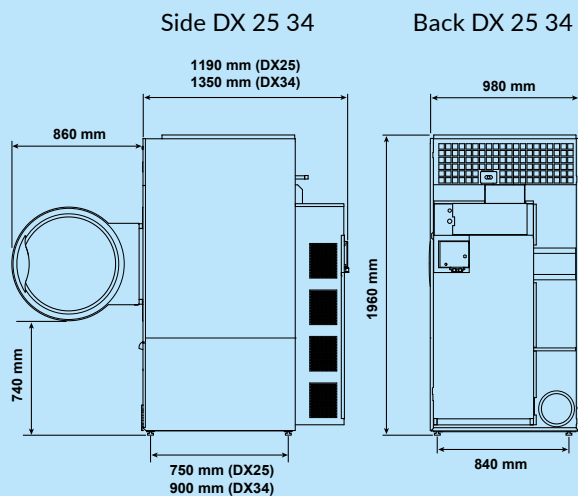

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

