

STACK TUMBLE DRYERS

DX
RANGE

DX13/13 **DX20/20**

2X13KG
2X30LB

2X20KG
2X45LB



FEATURES


- Double capacity on the same footprint
- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Gas, Electrical and Steam heating (DX13/13)
- Gas heating (DX20/20)
- Large door opening for easy loading and unloading (DX 13/13 Ø 57cm, DX 20/20 Ø 68cm)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Residual moisture control Sensodry+® (only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System
- Reversing drum



SUITABLE FOR
LAUNDROMATS




STACKABLE
UNIT




EASY
OPERATION

TYPE		DX13/13	DX20/20
CAPACITY			
Capacity	kg	2x13	2x20
Drum volume	l	2x300	2x420
Drum diameter	mm	Ø 762	Ø 838
AIRFLOW			
Airflow	l/s	380	570
DRYING AVERAGE			
Gas heating	g/min	294	385
Electric heating	g/min	258	-
MOTOR			
Fan	kW	2x0,4	2x0,4
Drive	kW	2x0,2	2x0,4
GAS HEATING			
Energy (per pocket)	kW	21,4	27,8
Energy (per pocket)	kBTU/h	73	95
Electrical connection		1x100-120V/50-60Hz, 1-3x200-240V/50-60 Hz 3x440-480V/50-60Hz, 3x380-415V/50-60Hz	
Gas connection (one manifold)	NPT	½"	½"
STEAM HEATING			
High pressure 6,9 bar (per pocket)	kW kBTU/h	25,03 85,4	- -
Electrical connection		1x100-120V/50-60Hz, 1-3x200-240V/50-60 Hz 3x440-480V/50-60Hz 3x380-415V/50-60Hz	
Steam connection	NPT	¾"	-
ELECTRICAL HEATING			
Energy (per pocket)	kW	21	-
Electrical connection		3x200-208V/50-60Hz, 3x230-240V/50-60Hz 3x380V/50-60Hz, 3x400-415V/50-60Hz 3x440V/50-60Hz, 3x460-480V/50-60Hz	
EXHAUST	Ø /mm	1x200	1x250
DIMENSIONS			
Size HxWxD	mm	1940x800x1090	2065x875x1235
Net weight (E, G, S)	kg	300, 260, 275	- , 320, -
TRANSPORT DATA			
Packed (foil) HxWxD	mm	2030x830x1190	2160x900x1370
Gross weight (foil E, G, S)	kg	300, 270, 290	- , 340, -
Packed (crate) HxWxD	mm	2210x900x1270	2210x1020x1520
Gross weight (crate E, G, S)	kg	360, 330, 350	- , 420, -

Side DX 13/13 20/20

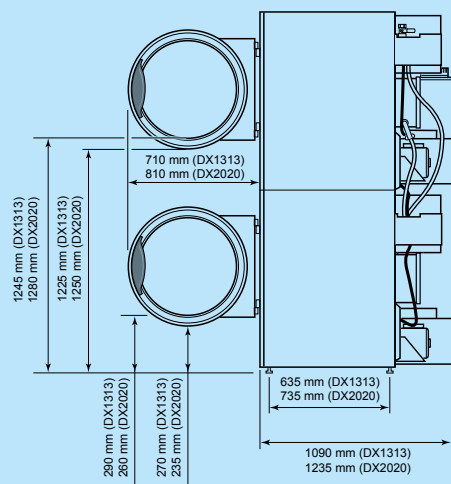

Back DX 13/13 20/20

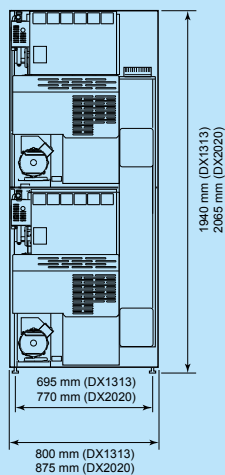

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

