SPEED QUEEN MULTI-HOUSING

QUANTUM® GOLD COIN DROP INSTALLED, PREP FOR COIN, PREP FOR CARD

COMMERCIAL STACK WASHER/DRYER

Built for Reliable Performance

Speed Queen's stack washer/dryer brings an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on all floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Speed Queen's stack washer/dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Front load products have met every design standard to be 100% ADA compliant.

- · Integrated meter case
- · Large capacity meter case standard
- Wash Alert[™] capability

WASHER (ADA Compliant)

- · Rugged suspension system
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Durable stainless steel washtub
- · Four-compartment soap dispenser
- Extra-wide 15.5" door opening and 180° door swing

DRYER

- · Upfront lint filter easy to clean and secured
- Industry's largest door opening 2.06 sq. ft. (1914 cm2)
- Quiet, efficient blower system





Washer Control Dryer Control

The cutting edge Quantum control system from Speed Queen gives you the freedom to manage laundry your way with the power to achieve unmatched levels of revenue. Quantum Gold provides users with additional cycle choices while offering new options to help lower operating costs and incorporates tools and options to increase revenue.




SPECIFICATIONS

COMMERCIAL STACK WASHER/DRYER

110000	
MODEL - see below for all models and activation available	
	Ougastum Cald
CONTROL OPTION	Quantum Gold
COLOR	White
CAPACITY - lb (kg) Wash	
Dry	
OVERALL WIDTH - in (mm)	26.875 (683)
OVERALL DEPTH - in (mm)	27.73 (704)
OVERALL HEIGHT - in (mm)	78.17 (1986)
CYLINDER VOLUME Wash	er 3.42 (96.8)
cu. ft. (liters) Dry	er 7.0 (198)
MOTOR SIZE - HP (kW)	0.9 (0.67)
TYPE OF GAS (GAS MODELS ONLY)	Factory equipped natural/
WATER CONSUMPTION PER CYCLE - g (lite	r) 13.68 (51.78)
IWF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)	4.0 (0.53)
MEF ₁₂ (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)	2.20 (62.3)
AVAILABLE WATER TEMPERATURES	Hot, Warm, Cold
Wash AVAILABLE CYCLES	er Light, Medium, Heavy, Normal, Perm Press, Delicates/Bulky
Dry	er High, Medium, Low, Delicate, No Heat
AIR OUTLET DIAMETER - in (mm)	4 (102)
EXHAUST AIRFLOW - cfm (liters/sec)	220 (105)
ELECTRICAL Electric REQUIREMENTS	ric 120/240/60/1-30 amp 120/208/60/1-30 amp
G. G. G.	as 120/60/1-15 amp
HEATING ELEMENT Electr	5350W, 240V 4750W, 208V
G	as 25,000 Btu
NET WEIGHT - Ib (kg)	385 (175)
SHIPPING WEIGHT - Ib (kg)	417 (189)
Wid	th 34 (864)
SHIPPING DIMENSIONS APPROX in (reserv) Dep	th 30 (762)
APPROX in (mm) Heig	, ,
Electi	, ,
AGENCY APPROVALS	as cCSAus

MODELS	VOLTAGE/FREQ/PH		DRAIN	ACTIVATION	
STENCASP175TW01	120/240/60/1	Electric	Pump	Coin Drop Installed	100
STGNCASP115TW01	120/60/1	Gas	Pump		0
STENXASP175TW01	120/240/60/1	Electric	Pump	Prep for Coin	7
STGNXASP115TW01	120/60/1	Gas	Pump		1
STGNXASG115TW01	120/60/1	Gas	Gravity		12 - AN .
STENYASP175TW01	120/240/60/1	Electric	Dump	Prep for Card	_
STEWYASP175TW01*	120/240/60/1	Electric	Electric Pump		CANAL PROPERTY.
STGNYASP115TW01	120/60/1	Gas	Pump		<u> </u>
STGWYASP115TW01*	120/60/1	Gas	Pump		

^{*} Wireless Network Board Factory Installed

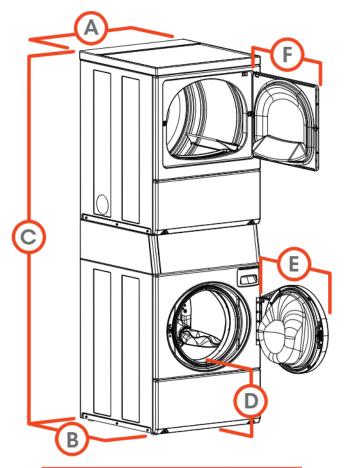

A.	OVERALL WIDTH - in (mm)	26.875 (683)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	78.17 (1986)
D.	FLOOR TO DOOR OPENING -in (mm)	14.6 (371)*
E.	DOOR SWING - in (mm)	24 (610)

 $^{^\}star$ For ADA compliance turn legs out from base 0.5 inches

NOTE: Stack washer/dryer requires two power cords. One for washer, one for dryer.

 Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

