


UniMac

Maximum Performance

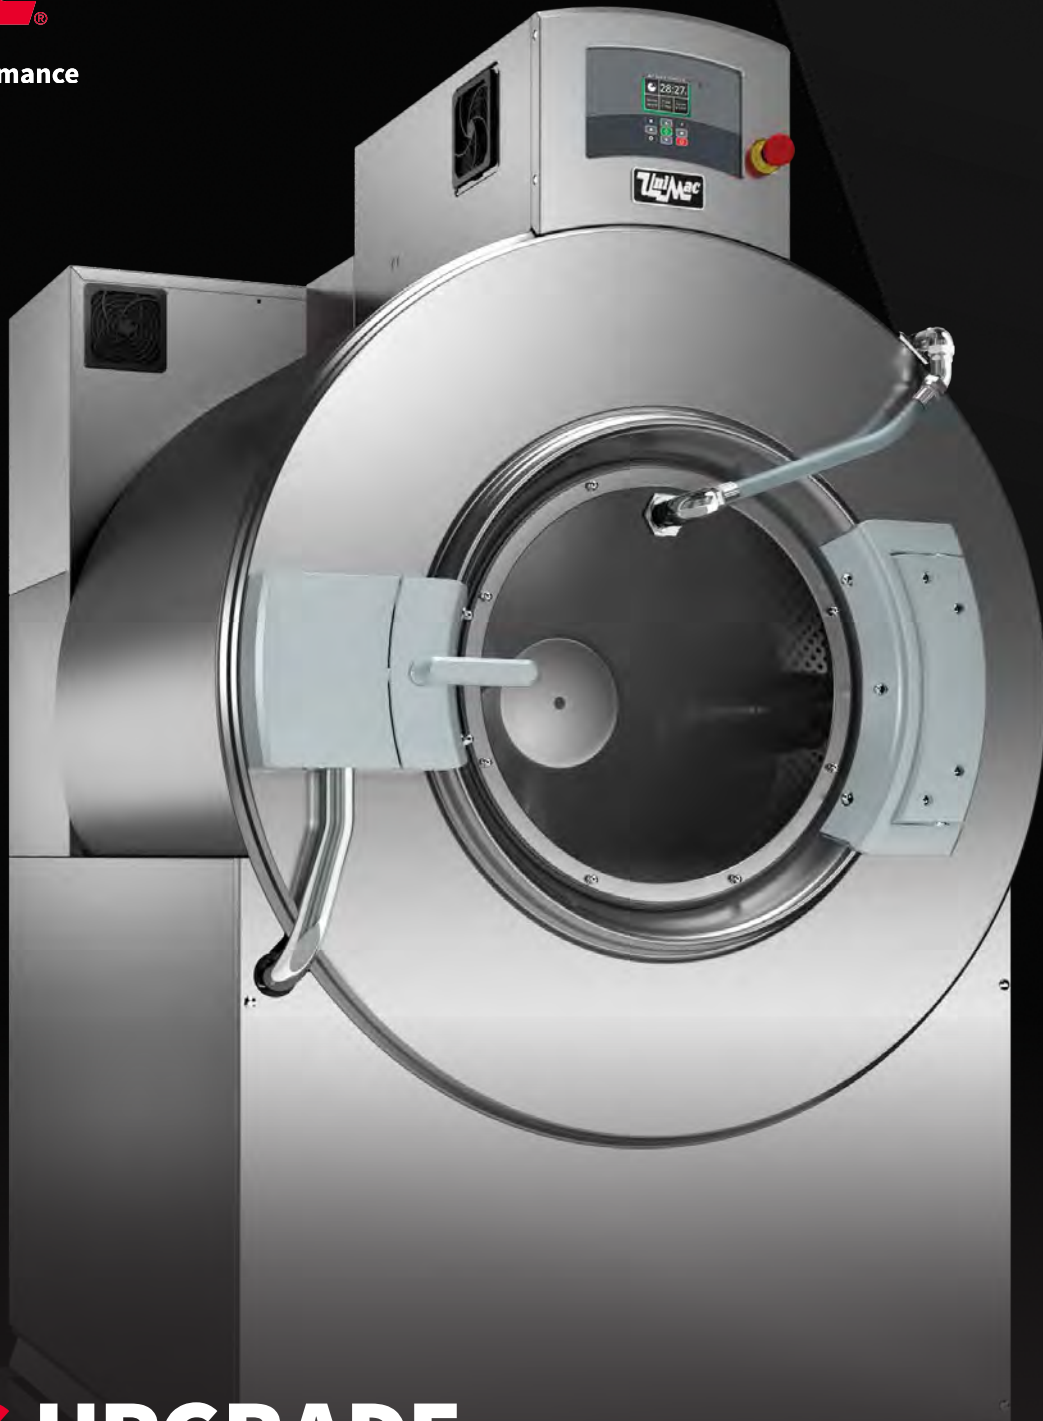

**A BIG UPGRADE—
WITH A SMALL FOOTPRINT.**

UNIMAC.COM

UW 85-200 HARDMOUNT WASHER-EXTRACTOR

YOU ASKED, WE DELIVERED

The game-changing redesign of our 45 lb–160 lb machines got people talking. “If we can have innovative technology, industrial strength and a small footprint—all in a wider range of sizes,” they said, “why can’t we have even *more* capacity?”

Our response? “Why not, indeed...”

Building on more than 60 years of incomparable UniMac® quality, the UW200 picks up where its siblings left off: providing a combination of versatility, maximized throughput and utilities savings that our competitors simply can’t touch.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality. Our products undergo a 5-stage product development process and are pushed beyond their limits in our state-of-the-art test lab to ensure they exceed the toughest demands of the commercial environment and meet our customers’ highest standards.

UNILINC™ + TOTALVUE™ = ONE COMPLETE SOLUTION

UniMac's total-solution approach is the answer to identifying inefficiencies and process breakdowns in order to improve operations. It all starts with UniLinc, which gathers and automatically records machine performance and maintenance data. TotalVue then compiles the information into easy-to-read, graphical reports that give you a real-time, at-a-glance view of the performance data that matters most.



The results?

INCREASED:

- Utilization
- Efficiency
- Throughput
- Flexibility & control
- Profitability

DECREASED:

- Downtime
- Water & energy usage
- Labor expense
- Operational expense

UniLinc®

TotalVue™

HIGHER PERFORMANCE. LOWER COSTS.

OPTispray is an industry-exclusive technology designed to reduce both the water and time necessary to complete a rinse cycle. Unlike bath rinses used by competitor brands, which simply dilute wash chemistry, OPTispray uses spray-rinsing power to pull wash chemistry through the load and down the drain. The spray rinse carries away dirt and chemicals, leaving less residue behind—and providing far superior rinse results.



OPTISPRAY



NORMAL RINSE

OPTISPRAY WATER SAVINGS¹

\$2,622

WATER REDUCTION

In a 200 lb washer, OPTispray Rinsing Technology saves an average of 57 gallons of water per load versus traditional bath rinses.

23%

SAVINGS PER YEAR

Estimated annual savings in water, sewer and heating costs with UW200.

INCREDIBLY SMALL FOOTPRINT

The UW200's high productivity and small footprint mean no other unit can compete in terms of throughput/floorspace.

Significantly smaller than Brand X pocket:

- UW200 – 46.1" wide x 67.3" deep
- Brand X 160 lb – 51.4" wide x 79.5" deep

Smaller footprint than softmounts:

- UW200 – 46.1" wide x 67.3" deep
- Brand A 180 lb – 60.2" wide x 70.7" deep
- Brand B 170 lb – 62.9" wide x 80.0" deep
- Brand C W4850H – 64.6" wide x 64.4" deep
- Brand D SI-200 lb – 67.1" wide x 81.5" deep

¹ Savings Assumptions: 10 loads/day x 365 days/year – Water rate \$5/1000 gal – Sewer \$5/1000 gal and 93% of incoming water goes to drain, 7% retained in load – Gas cost = \$1/therm, 75°F temp rise, 85% gas heater efficiency, and 65% of incoming water is heated using an external water heater (Local utility rates vary widely and groundwater temps vary by region; check your local data and adjust accordingly.)

UW HARDMOUNT WASHER-EXTRACTORS 85-200LB

| SPECIFICATIONS | | UW85 | UW105 | UW130 | UW160 | UW200 |
|--------------------------------------|-------------------|-------------|-------------|--|--|--|
| Capacity - lb (kg) | | 85 (38.5) | 105 (47.6) | 130 (60) | 160 (72.6) | 200 (90.7) |
| Cylinder Diameter - in (mm) | | 36 (914) | 36 (914) | 42 (1067) | 42 (1067) | 42 (1067) |
| Cylinder Depth - in (mm) | | 22 (559) | 27 (686) | 24½ (622) | 30 (762) | 37½ (953) |
| Cylinder Volume - cu ft (liters) | | 13 (368) | 15.9 (450) | 19.6 (555) | 24.1 (682) | 30.1 (852) |
| Width - in (mm) | | 40.1 (1019) | 40.1 (1019) | 46.1 (1171) | 46.1 (1171) | 46.1 (1171) |
| Depth - in (mm) | | 51.2 (1300) | 56.2 (1427) | 54.5 (1384) | 60 (1524) | 67.5 (1715) |
| Height - in (mm) | | 67.6 (1717) | 67.6 (1717) | 72.6 (1844) | 72.6 (1844) | 72.6 (1844) |
| Door Opening Size - in (mm) | | 21 (533) | 21 (533) | 24 ¹³ / ₁₆ (630) | 24 ¹³ / ₁₆ (630) | 24 ¹³ / ₁₆ (630) |
| Door Bottom to Floor - in (mm) | | 28.8 (732) | 28.8 (732) | 30.5 (775) | 30.5 (775) | 30.5 (775) |
| Motor Size - HP (kW) | | 7.5 (5.6) | 7.5 (5.6) | 10 (7.5) | 10 (7.5) | 10 (7.5) |
| Control Options | | UniLinc™ | UniLinc™ | UniLinc™ | UniLinc™ | UniLinc™ |
| Total # of Speeds | | V Sp | V Sp | V Sp | V Sp | M Sp |
| | | 9 | 9 | 9 | 9 | 9 |
| Cylinder Speed RPM (G-Force) | Gentle | 28 (.40) | 28 (.40) | 26 (.40) | 26 (.40) | 26 (.40) |
| | Wash | 39 (.78) | 39 (.78) | 36 (.77) | 36 (.77) | 36 (.77) |
| | Distribution | 70 (2.5) | 70 (2.5) | 65 (2.5) | 65 (2.5) | 65 (2.5) |
| | Very Low Extract | 230 (27) | 230 (27) | 213 (27) | 213 (27) | 213 (27) |
| | Low Extract | 443 (100) | 443 (100) | 410 (100) | 410 (100) | 366 (80) |
| | Medium | 542 (150) | 542 (150) | 502 (150) | 502 (150) | 410 (100) |
| | High Extract | 626 (200) | 626 (200) | 579 (200) | 579 (200) | 458 (125) |
| | Very High Extract | 700 (250) | 700 (250) | 648 (250) | 648 (250) | 502 (150) |
| Ultra High Extract | 766 (300) | 766 (300) | 710 (300) | 710 (300) | 579 (200) | |
| Drain Diameter - in (mm) | | 2 @ 3 (76) | 2 @ 3 (76) | 2 @ 3 (76) | 2 @ 3 (76) | 2 @ 3 (76) |
| Steam Connection - in (mm) | | ½ (13) | ½ (13) | ¾ (19) | ¾ (19) | ¾ (19) |
| Water Inlet Connection - in (mm) | | 4 @ ¾ (19) | 4 @ ¾ (19) | 2 @ 1 (25) + 2 @ ¾ (19) | 2 @ 1 (25) + 2 @ ¾ (19) | 2 @ 1 (25) + 2 @ ¾ (19) |
| Shipping Dimensions - in (mm) | Width | 43.2 (1097) | 43.2 (1097) | 49.2 (1250) | 49.2 (1250) | 49.2 (1250) |
| | Depth | 61.8 (1570) | 61.8 (1570) | 64.8 (1646) | 64.8 (1646) | 72.3 (1836) |
| | Height | 69.4 (1763) | 69.4 (1763) | 76.4 (1941) | 76.4 (1941) | 76.4 (1941) |
| Net Weight - lb (kg) | | 1670 (757) | 1700 (771) | 2040 (925) | 2070 (939) | 2160 (980) |
| Standard Shipping Weight - lb (kg) | | 1720 (780) | 1750 (794) | 2100 (953) | 2130 (966) | 2220 (1007) |
| Slat Crate Shipping Weight - lb (kg) | | 1870 (848) | 1900 (862) | 2260 (1025) | 2290 (1039) | 2390 (1084) |
| Agency Approvals | | cULus | cULus | cULus | cULus | cULus |

**TO LEARN MORE OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON, WI 54971 - 1.800.587.5458**

Consult your UniMac distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility have been registered to ISO 9001:2008.