

**UY SOFTMOUNT  
WASHER-EXTRACTORS 20-70 LB**



**SERIOUS ABOUT LAUNDRY.**

**UniMac®**




SERIOUS ABOUT LAUNDRY.

## UY SOFTMOUNT WASHER-EXTRACTORS 20–70 LB

As the leading manufacturer of on-premises laundry equipment, UniMac® offers more than 60 years of incomparable quality and long-lasting performance. Our UY Series is built with unyielding construction to ensure industrial strength. Our cutting-edge innovations and technologies reduce costs and maximize throughput. And we're constantly improving. It's all part of our commitment to providing the lowest cost of ownership in the industry.

### LOWER YOUR COSTS WITH UNIMAC®

Consider the areas where you spend your laundry dollar. Understanding your expenses will better equip you to control them and ensure that you are operating at peak profitability.

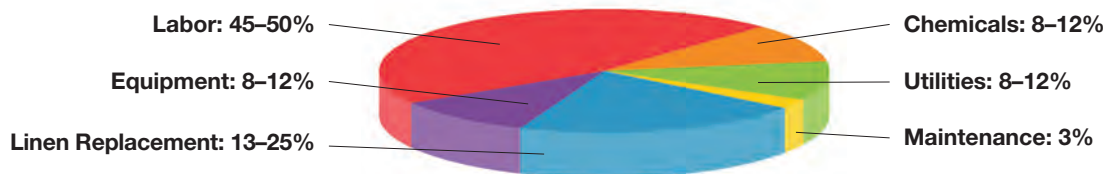

### REDUCE YOUR LABOR AND UTILITY COSTS

Our UY Series machines are constructed to make your laundry operation more efficient and reduce two of your largest expenses — labor and utility costs — with these powerful features:

Many laundries operate inefficiently due to a simple fact: dryer cycles are usually 30% longer than wash cycles. Each of our machines extract with **super-high 350–400 G-Force** to remove more water from the load, equalizing washer and dryer times and allowing your laundry to run at optimum efficiency and increase throughput. A machine with a higher G-Force delivers bottom-line utility savings by decreasing dry times, saving up to 40% on your gas bills compared to standard 100 G-Force competitive models.

In addition, innovative **ECO Technology** washing programs and unique product design features greatly reduce water costs, delivering 15% water savings versus older models in the market.

**Laundry Management System (LMS)**, powered by the PROform Control, gives you complete control of machine setup and wash program updates. With location management, maintenance data and alarms via email — all through a wired or wireless Wi-Fi connection — monitoring your laundry and maximizing productivity have never been easier.

## FLEXIBLE INSTALLATION

Our softmount washer-extractors not only save on utility costs, but on installation time and costs as well. The freestanding design installs quickly with same-day operation. These machines are the perfect choice for second-floor laundries or other installations where a concrete floor isn't an option. Heavy-duty coil springs eliminate the need for special foundations, and strategically placed shock absorbers result in a tuned suspension system that absorbs out-of-balance load vibrations.

## TAKE CONTROL OF YOUR LAUNDRY

The cutting-edge PROform Control features 99 programming options, eight liquid chemical soap connections, multi-language capability and a variety of extra functions from soak to advanced start. Easy and intuitive, the graphical display provides numeric keypads and is organized for simple control and navigation. Update wash programs manually on the machine, use a USB memory stick or update on your PC via LMS. Additionally, an end-of-cycle signal allows you to maximize efficiency.

## INDUSTRY-LEADING DURABILITY

Our softmount washer-extractors are manufactured with unyielding construction and industrial strength. They're designed with high-quality, stainless steel front, top and side panels and reinforced side panels for increased strength and durability. The formed steel frame is engineered with robust technology for added strength. And a modular bearing housing design ensures the equipment is long lasting and easy to service. This product also offers an inverter drive system that delivers low energy use, higher torque, high extraction speed, lower noise and less imbalance.

## WORRY-FREE PERFORMANCE

We're dedicated to manufacturing products that meet our customers' needs. We build our equipment to the strictest possible standards, and we provide you with an industry-leading warranty along with comprehensive support from the largest, most knowledgeable and responsive distributor network in the industry.



### WARRANTY

A five-year warranty covers the frame, basket, shaft, bearings and seals from failure or breakage during normal operation due to defects in material or workmanship. A limited three-year warranty is offered on all other parts.

### SERVICE PARTS AVAILABILITY

### FACTORY-TRAINED TECHNICIANS AND GLOBAL DISTRIBUTION NETWORK

### SERVICE TRAINING CERTIFICATION FOR DISTRIBUTORS

### INDUSTRY-LEADING, LAUNDRY-FOCUSED FINANCING

### LAUNDRY DESIGN SERVICES

## UY SERIES — AT A GLANCE:

- 99 programming options
- Sleek, modern design with a slanted control panel
- High-quality, stainless steel front, top and side panels
- Stainless steel inner drum and tub
- Unique drum increases mechanical action for better washing results and optimized water extraction
- Large drain valve for increased throughput
- High-capacity water inlets for fast fill
- Easy-to-use, four-compartment dispenser
- Eight liquid chemical connections
- 13 chemical ports of various sizes, including 1/2" manifold flush connections
- Large door opening for easy loading and unloading
- Ozone-compatible design
- Easy control access — no need to remove top panel
- Durable micro-v belt for long life



## UY SERIES SOFTMOUNT WASHER-EXTRACTORS 20–70 LB

	UY20	UY25	UY30	UY40	UY55	UY70
Control	PROform	PROform	PROform	PROform	PROform	PROform
Capacity - lb (kg)	20 (8)	25 (11)	30 (14)	40 (18)	55 (24)	70 (31)
Dimensions	-	-	-	-	-	-
Width - in (mm)	27 15/16 (710)	31 5/16 (795)	31 5/16 (795)	38 3/16 (970)	38 3/16 (970)	38 3/16 (970)
Depth - in (mm)	31 1/8 (790)	31 5/16 (795)	37 3/16 (945)	38 3/16 (970)	43 1/2 (1105)	46 5/8 (1185)
Height - in (mm)	43 7/8 (1115)	48 1/4 (1225)	48 1/4 (1225)	55 1/2 (1410)	55 1/2 (1410)	55 1/2 (1410)
Cylinder Diameter - in (mm)	20 7/8 (530)	24 3/8 (620)	24 3/8 (620)	29 1/2 (750)	29 1/2 (750)	29 1/2 (750)
Cylinder Depth - in (mm)	13 3/4 (350)	13 3/4 (350)	17 3/4 (450)	16 (410)	21 1/2 (545)	24 1/2 (620)
Cylinder Volume - cu. ft. (liters)	2.6 (75)	3.7 (105)	4.8 (135)	6.4 (180)	8.5 (240)	9.9 (280)
Door Opening Size - in (mm)	13 (330)	16 1/8 (410)	16 1/8 (410)	18 1/8 (460)	18 1/8 (460)	18 1/8 (460)
Door Bottom to Floor - in (mm)	13 3/4 (349)	13 1/2 (342)	13 1/2 (342)	18 3/4 (477)	18 3/4 (477)	18 3/4 (477)
Wash Speed - RPM	49	49	49	42	42	42
Extract Speed - RPM	1165	1075	1075	980	980	915
Extract G-Force	400	400	400	400	400	350
Water Inlet Conn. - in (mm)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)
Steam Inlet Conn. - in (mm)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)
Drain Conn. Size - in (mm)	3 (76)	3 (76)	3 (76)	3 (76)	3 (76)	3 (76)
Motor Size - HP (kW)	1.00 (0.75)	1.48 (1.10)	2.01 (1.50)	2.95 (2.20)	4.02 (3.00)	4.02 (3.00)
Voltage/Hz/Phase Circuit	200-240V 50/60Hz 1/3ph	200-240V 50/60Hz 1/3ph	200-240V 50/60Hz 1/3ph	200-240V 50/60Hz 1/3ph	200-240V 50/60Hz 1/3ph 440-480V 50/60Hz 3ph	200-240V 50/60Hz 1/3ph 440-480V 50/60Hz 3ph
Shipping Dimensions	-	-	-	-	-	-
Height - in (mm)	49 (1245)	52 15/16 (1345)	52 15/16 (1345)	61 (1550)	61 (1550)	61 (1550)
Width - in (mm)	29 1/2 (750)	32 7/8 (835)	32 7/8 (835)	40 3/8 (1025)	40 3/8 (1025)	40 3/8 (1025)
Depth - in (mm)	33 1/16 (840)	33 1/16 (840)	38 3/4 (985)	40 (1015)	45 1/4 (1150)	48 1/4 (1225)
Net Weight - lb (kg)	408 (185)	463 (210)	563 (255)	838 (380)	948 (430)	1092 (495)
Shipping Weight - lb (kg)	441 (200)	518 (235)	606 (275)	871 (395)	992 (450)	1135 (515)
Agency Approvals	CSA	CSA	CSA	CSA	CSA	CSA



**To learn more, or to find a distributor in your area, visit [UNIMAC.COM](http://UNIMAC.COM)**  
**Alliance Laundry Systems - Shepard St, Ripon WI 54971 - 1.800.587.5458**

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Czech facility has been registered to ISO 14001:2005 and 9001:2009.

© 2015 Alliance Laundry Systems LLC. Printed in the U.S.A.

**UniMac®**

**SERIOUS ABOUT LAUNDRY.**

DISTRIBUTOR INFORMATION HERE