

COMMERCIAL DRYERS



Featuring Factory-Installed Coin Slide and Coin Box



FOR YOUR CUSTOMERS

- Large Capacity is Ideal for Family-Size Loads
- Increased Capacity Allows Large Loads to Tumble and Spread, Reducing Dry Time
- 3 Cycle Options: Heavy Duty, Normal and Delicates
- Automatic Temperature Select
- 180°-Wide-Opening Side-Swing Door Allows for Convenient Access
- Ergonomic Control Knobs

SINGLE OPERATING THERMOSTAT

For simple, accurate temperature control.

LARGE-CAPACITY COIN VAULT

Larger coin box for reduced collections.



CEM2743BQ—27" Electric Dryer CGM2743BQ—27" Gas Dryer

- 7.4-Cu.-Ft. Drum Capacity
- Ergonomic Control Knobs
- 3 Cycles: Heavy Duty, Normal, Delicates
- 180°-Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top and Lid, Rustproof Stainless Steel Torx® Screws For Increased Security
- Galvanized Heavy-Gauge Cabinet Back, Side and Front Panels
- Ball Bearing Idler Pulley
- 1/3 HP Motor
- Factory Coin Slide and Coin Box Equipped, \$1.00 Factory Preset Vend V8 Coin Slide
- Power Cord Sold Separately (Electric Model Only)
- **90-Day Labor/2-Year Limited Parts Only Warranty***

*Call 1-800-662-3587 for warranty details.

COMMERCIAL DRYERS



Featuring Factory-Installed Coin Slide and Coin Box


Whirlpool® Commercial Dryers Factory-Installed Coin Slide and Coin Box

DRYER SPECIFICATIONS		
MODELS	CEM2743BQ	CGM2743BQ
GENERAL INFORMATION		
Modern design and look with metal console and ergonomic control knobs.	Coin Vault Model, Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle	Coin Vault Model, Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle
DRUM VOLUME	7.4 Cu. Ft.	7.4 Cu. Ft.
MOTOR	1/3 HP Single-Speed Motor with Built-In Overload Protector	1/3 HP Single-Speed Motor with Built-In Overload Protector
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard, 30-Amp Breaker/Fuse Circuit per Dryer (Subject to Local Codes)	120 Volt, 60 Hz, A.C. Standard, 15-Amp Breaker/Fuse Circuit per Dryer (Subject to Local Codes)
HEATER TYPE	Electric	Gas*
HEATER/BURNER RATING	Heater Rated at 5600 Watts	22,000 BTU Natural Gas
OPERATIONAL AMPERAGE	Motor—4.0 AMPS, No Load Heater—23.33 AMPS @ 240 Volt—27.33 Total	Motor—4.0 AMPS, No Load
SHIPPING WEIGHT (EST.)	159 lbs. Crated, 145 lbs. Uncrated	159 lbs. Crated, 145 lbs. Uncrated
DIMENSIONS		
Width—in. (mm)	27 (686)	27 (686)
Depth—in. (mm)	29.25 (743)	29.25 (743)
Height—in. (mm) at Metercase Top	43.25 (1099)	43.25 (1099)

*Burner orifices are available for manufactured, natural, mixed and LP gas with varying BTU ratings.




Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

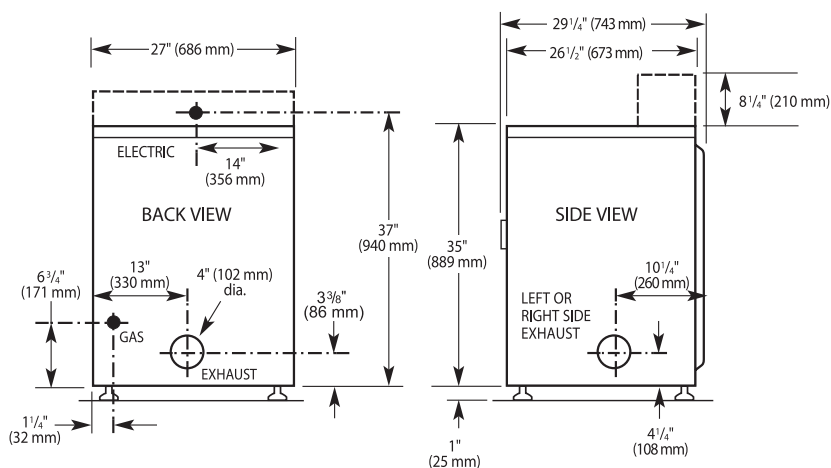

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

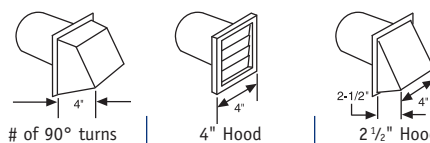

# of 90° turns	Maximum length of 4" diameter rigid metal duct	
	0	64 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
# of 90° turns	Maximum length of 4" diameter flexible metal duct	
	0	36 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.



To Locate a Distributor Near You, Please Visit www.whirlpoolcommerciallaundry.com/distributor, or call 1-800-662-3587.

TORX is a registered Trademark of Textron Industries, Inc.

©/™ 2013 Whirlpool. All rights reserved.

Whirlpool Corporation • Benton Harbor, Michigan 49022 U.S.A.

WY130106 8/13